

NOTES:


1. 1/2"  $\varnothing$  MOUNTING HARDWARE IS RECOMMENDED FOR 5X5 BASEPLATE MODELS. L-BOLT-500, STUD-ANCHOR-500.
2. 5/8"  $\varnothing$  MOUNTING HARDWARE IS RECOMMENDED FOR 8X8 AND 12X12 BASEPLATE MODELS. L-BOLT-625, STUD-ANCHOR-625
3. MATERIAL OF CONSTRUCTION IS 304SS, BRUSHED #4 FINISH.



PEDESTALPRO.COM  
1-800-660-3072

UNLESS OTHERWISE SPECIFIED:	DRAWN	NAME	DATE	TITLE:		
DIMENSIONS ARE IN INCHES				Thursday, October 25,	SIZE	REV
TOLERANCES:				2018 3:57:46 PM	A	B
FRACTIONAL $\pm 1/32$				22PE1-2NIP-04-304		
ANGULAR: $\pm 2^\circ$						
TWO PLACE DECIMAL $\pm 0.010$						
THREE PLACE DECIMAL $\pm 0.005$						
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009						
				NO SCALE		SHEET 1 OF 6

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	22PE1-2NIP-02-304	2X2X.120 SQ SS TUBE	1
2	PLTBAS-5-2	5" STANDARD BASE PLATE	1
3	PLTCOV-5-2	5" STANDARD COVER PLATE	1
4	2N VERSO SOLO BACK PLATE	2N VERSO SOLO BACK BOX	1
5	2N VERSO SOLO FACE PLATE	2N VERSO SOLO FACE PLATE	1

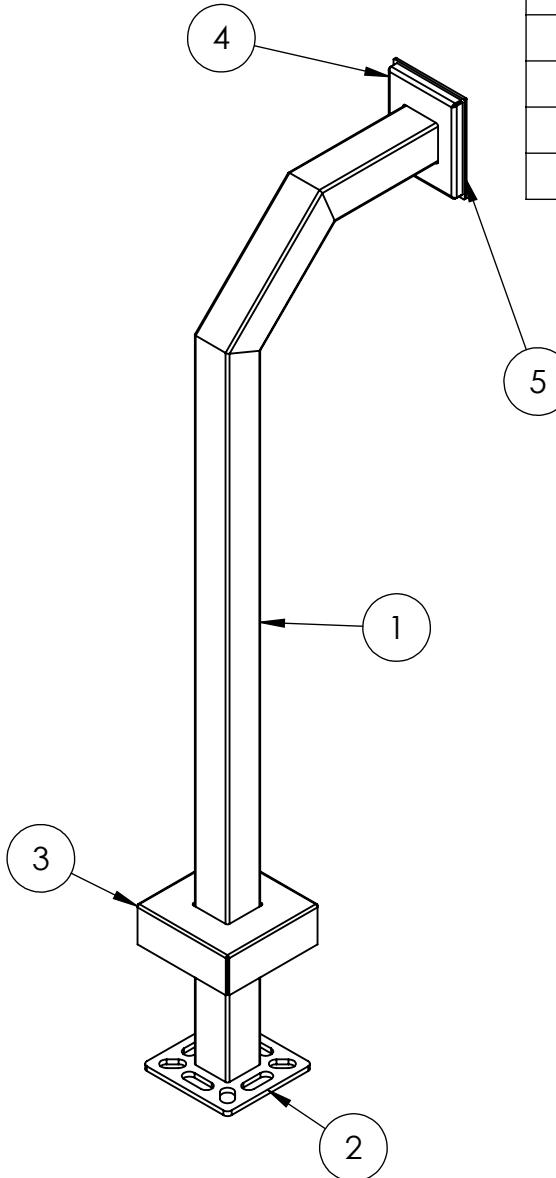

NOTES:

1. BUTT WELDED SECTIONS ARE NOT ALLOWED, EACH SECTION OF TUBE MUST BE FROM CONTINUOUS STOCK.
2. ALL WELDS ARE TO BE CONTINUOUS FILLET WELDS UNLESS NOTED OTHERWISE.
3. SEE STANDARD PREPARATION AND COATING INSTRUCTIONS FOR COATING PROCEDURE AND COLOR.
4. FASTENERS ARE TO BE BAGGED AND SHIPPED WITH PEDESTAL.
5. SEE STANDARD PACKAGING INSTRUCTIONS FOR PACKAGING PROCEDURE.



PEDESTALPRO.COM  
1-800-660-3072

UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/32$ ANGULAR: $\pm 2^\circ$ TWO PLACE DECIMAL $\pm 0.010$ THREE PLACE DECIMAL $\pm 0.005$	DRAWN  CHECKED	NAME  DATE	TITLE:  <b>ASSEMBLY</b>		
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009	Thursday, October 25, 2018 3:57:46 PM			SIZE <b>A</b>	PART NO. 22PE1-2NIP-04-304
				REV <b>B</b>	
	WEIGHT:	NO SCALE			SHEET 2 OF 6