



## T24130D Open Frame Transformer

### Specification Chart:


Model #	Input (Primary)	Output (Secondary)
T24130D	115VAC (1A) or 220VAC (0.5A) 50/60Hz	24VAC/100VA (4A)

### Installation Instructions:


1. Mount transformer in the desired location/enclosure (*refer to Transformer Drawing and Dimensions below*).
2. Connect AC power 115VAC or 220VAC, 50/60Hz to primary leads (black, white, red and blue) (*refer to Wiring Configuration below*).
3. Measure output voltage across the secondary leads Yellow and Brown before connecting devices. This helps avoiding potential damage. Open circuit voltage is approx. 26.1VAC (*refer to Wiring Configuration below*).
4. Connect 24VAC device to be powered to the secondary leads (brown and yellow) (*refer to Wiring Configuration below*).

**WARNING:** This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

### Wiring Configuration:

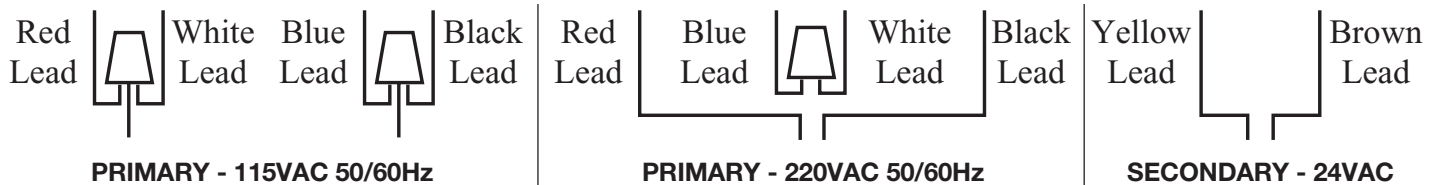

### Transformer Drawing and Dimensions:

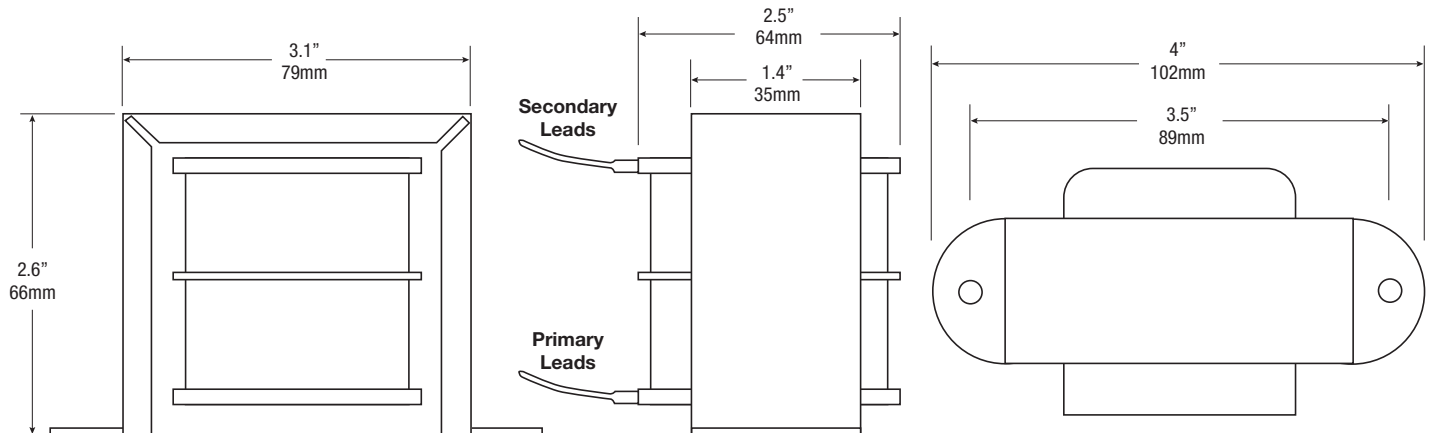

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056  
website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com)  
IIT24130D - Rev. 051712

J31R

