



# T2885D Open Frame Transformer

## Specification Chart:


Model #	Input (Primary)	Output (Secondary)
T2885D	115VAC (1A) or 220VAC (0.5A) 50/60Hz	28VAC/100VA (3.5A)

## Installation Instructions:


1. Mount transformer in the desired location/enclosure (*refer to Transformer Drawing and Dimensions below*).
2. Connect AC power 115VAC or 220VAC, 50/60Hz to the primary leads (black, white, red and blue) (*refer to Wiring Configuration below*).
3. Measure output voltage across the secondary leads Black and Brown before connecting devices. This helps avoiding potential damage. Open circuit voltage is approx. 30.4VAC (*refer to Wiring Configuration below*).
4. Connect 28VAC device to be powered to the secondary leads (brown and black) (*refer to Wiring Configuration below*).

**WARNING:** This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

## Wiring Configuration:

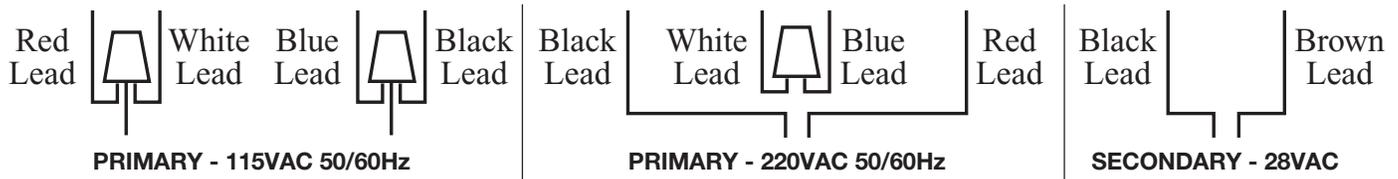

## Transformer Drawing and Dimensions:

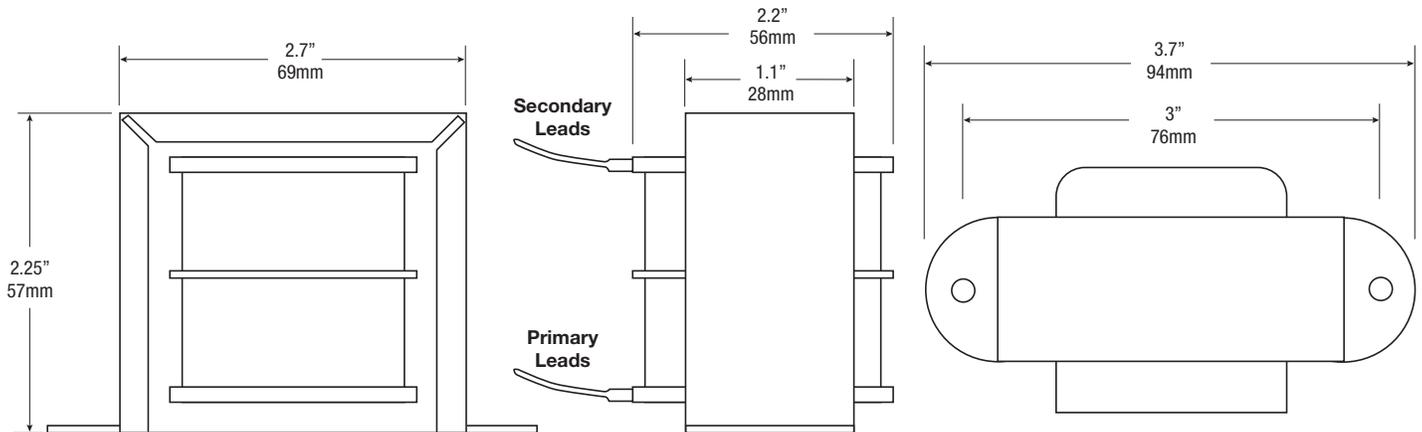

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056  
 website: www.altronix.com | e-mail: info@altronix.com  
 IIT2885D - Rev. 051712

E26Q

