

T3MK7716 (Kit)

Access & Power Integration Solution for Mercury



Altronix T3MK7716 kit consists of Trove3 enclosure and TM3 Altronix & Mercury backplane with two 24VDC @ 10A power supply/chargers, two eight (8) fuse protected output access control modules and two eight (8) fuse protected output power distribution modules. This kit also accommodates various combinations of Mercury* boards for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt



T3MK7716

Mercury boards are not included

Key Features

- 24VDC power supply/chargers
- Accommodates the following Mercury controllers:
Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - One (1) double knockout
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Sixteen (16) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Two (2) Power Supply/Chargers (AL1024ULXB2):

Input

Voltage 115VAC 60Hz, 4.2A
Fusing 5A/250V

Output

Voltage 24VDC
Current 10A @ 24VDC continuous max.
Other Overvoltage protection
Filtered and regulated

Back-up Battery

Capacity 12AH/12VDC (4 within enclosure)
40AH/65AH (requires separate enclosure)
Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous

Supervision

AC Failure Form "C" contacts
Battery Form "C" contacts

Indicators (LED)

Input 115VAC is present
DC Output Powered
Battery Discharged or not connected

Two (2) Power Distribution Modules (PD8UL):

Input

Voltage 12VDC from AL1024ULXB2

Outputs

Voltage 12VDC
Fuses 3.5A/250V

Indicators (LED)

Green LED DC Output

Two (2) Access Power Controllers (ACM8):

Input

Voltage 24VDC from AL1024ULXB2
Input Fuse 10A/250V

Outputs

Voltage 24VDC
Eight (8) 24VDC independently controlled fused outputs:
a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

Output Fuses 3.5A/250V

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
Green LED FACP disconnect is triggered

T3MK7716 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.
Please refer to the corresponding Sub-Assembly Installation Guides
for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:
40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product 85.6 lb. (38.83 kg)
Shipping 98.8 lb. (44.82 kg)

Temperature


Operating 0°C to 49°C (32°F to 120°F)
Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 289 BTU/Hr.

Access Controller Position Chart for the Following Models:

Altronix/Mercury	Pem Mounting
LP2500, MUX8	(A)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(B)
LP1501, MR62e	(C)
MR50	(D)

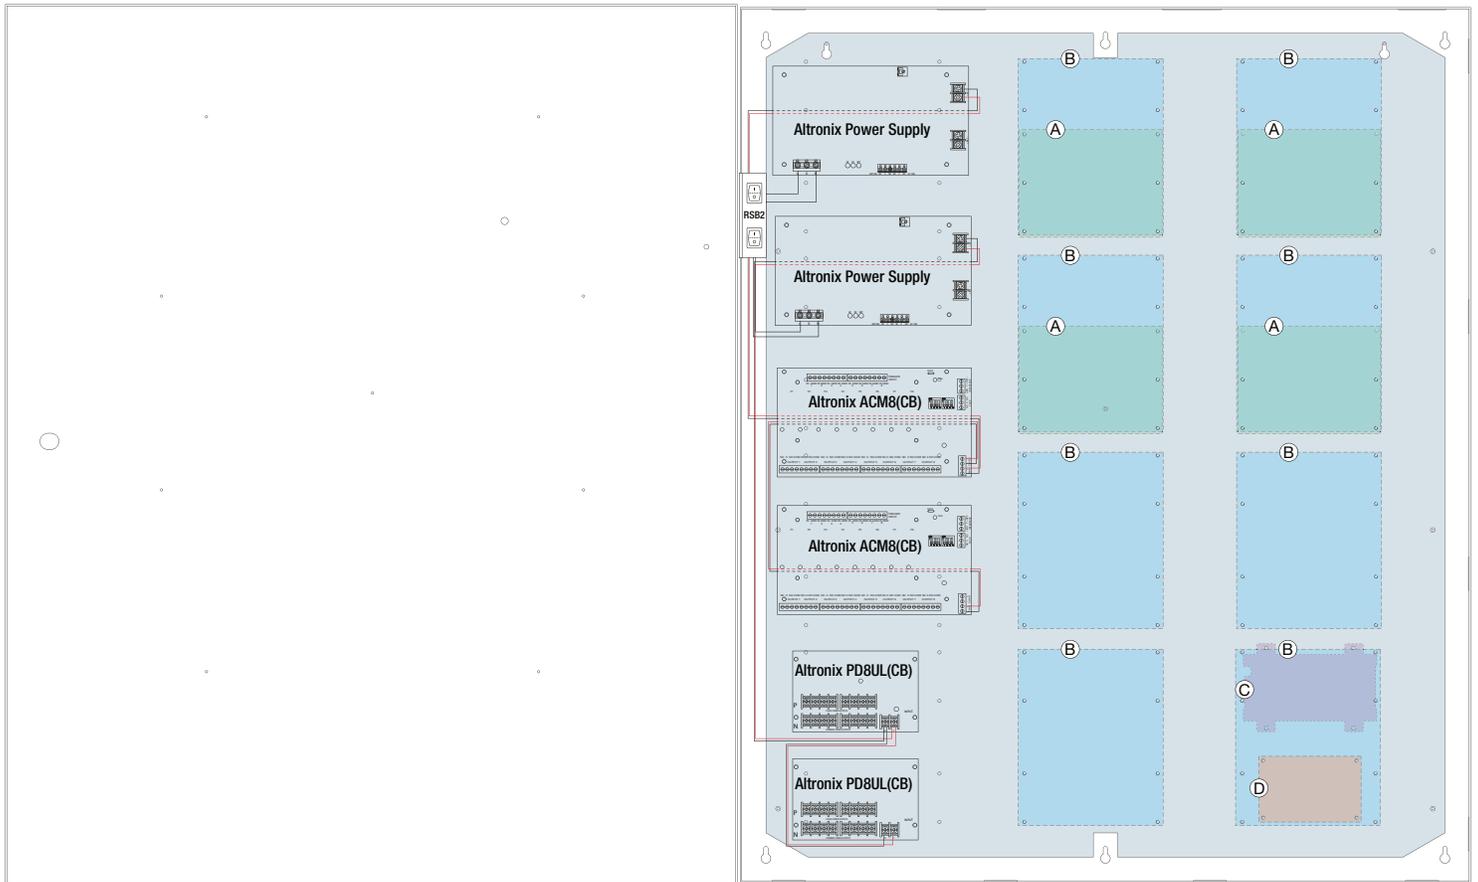

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

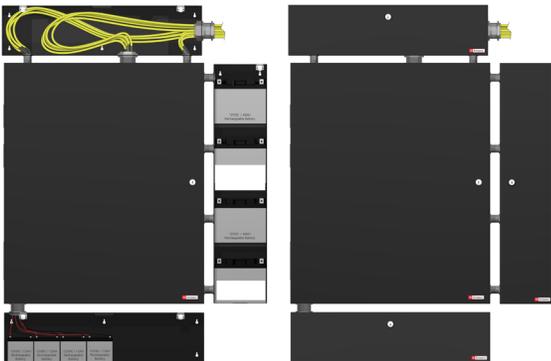

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

