

T3SK77724S (Kit)

Access & Power Integration Solution for Software House

TROVE™

Altronix T3SK77724S kit consists of Trove3 enclosure and TSH3 Software House/Altronix backplane with three (3) 24VDC @ 10A power supply/chargers, two (2) twelve (12) fuse protected dual output access control modules, two (2) 12VDC 6A voltage regulators and two (2) sixteen (16) fuse protected dual output power distribution modules. This kit also accommodates various combinations of Software House boards for up to twenty-four (24) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

SOFTWARE HOUSE

T3SK77724S

*Software House boards are not included***Key Features**

- 24VDC power supply/charger
- Accommodates the following Software House controllers:
iStar Ultra GCM and iStar Ultra ACM boards or
iSTAR Pro GCM and iSTAR ACM SE/PRO ACM boards,
as well as I8, R8, and I8-CSI boards
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Agency Listings:
 - CE European Conformity.
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications**Three (3) Power Supplies (AL1024ULXB2):****Input**

Voltage	115VAC 60Hz, 4.2A max.
Input Fuse	5A/250V

Output

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection Filtered and regulated

Battery Charging

Capacity	12VDC/12AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Dual Input Access Power Controllers (ACMS12):**Input**

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input Fuses	15A/32V

Outputs

Voltage	12VDC and/or 24VDC
Twelve (12) independently controlled fused outputs	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3A/32V
--------------	--------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Two (2) Voltage Regulators (VR6):**Input**

Voltage	24VDC from AL1024ULXB2
---------	------------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Two (2) Dual Input Power Distribution Modules (PDS16):**Input**

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input Fuses	15A/32V

Outputs

Voltage	12VDC and/or 24VDC
Any of the sixteen (16) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	

Outputs Ratings

Fuses	3A/32V
-------	--------

Indicators (LED)

DC Output	Sixteen (16) individual output LEDs
Green:	12VDC
Red:	24VDC

T3SK77724S Kit:**Agency Listings**

CE	European Conformity
----	---------------------

Physical and Environmental**Dimensions (H x W x D)**

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product	87.2 lb. (39.6 kg)
Shipping	100.5 lb. (45.6 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity


85% +/- 5%

BTU/Hr (approx.):

327 BTU/Hr.

Access Controller Position Chart for the Following Models:

Software House	Pem Mounting
iStar Pro GCM	(A)
iStar Ultra GCM	(B)
iStar Pro ACM, iSTAR ACM SE	(C)
iStar Ultra ACM	(D)
I8, R8 or I8-CSI	(E)

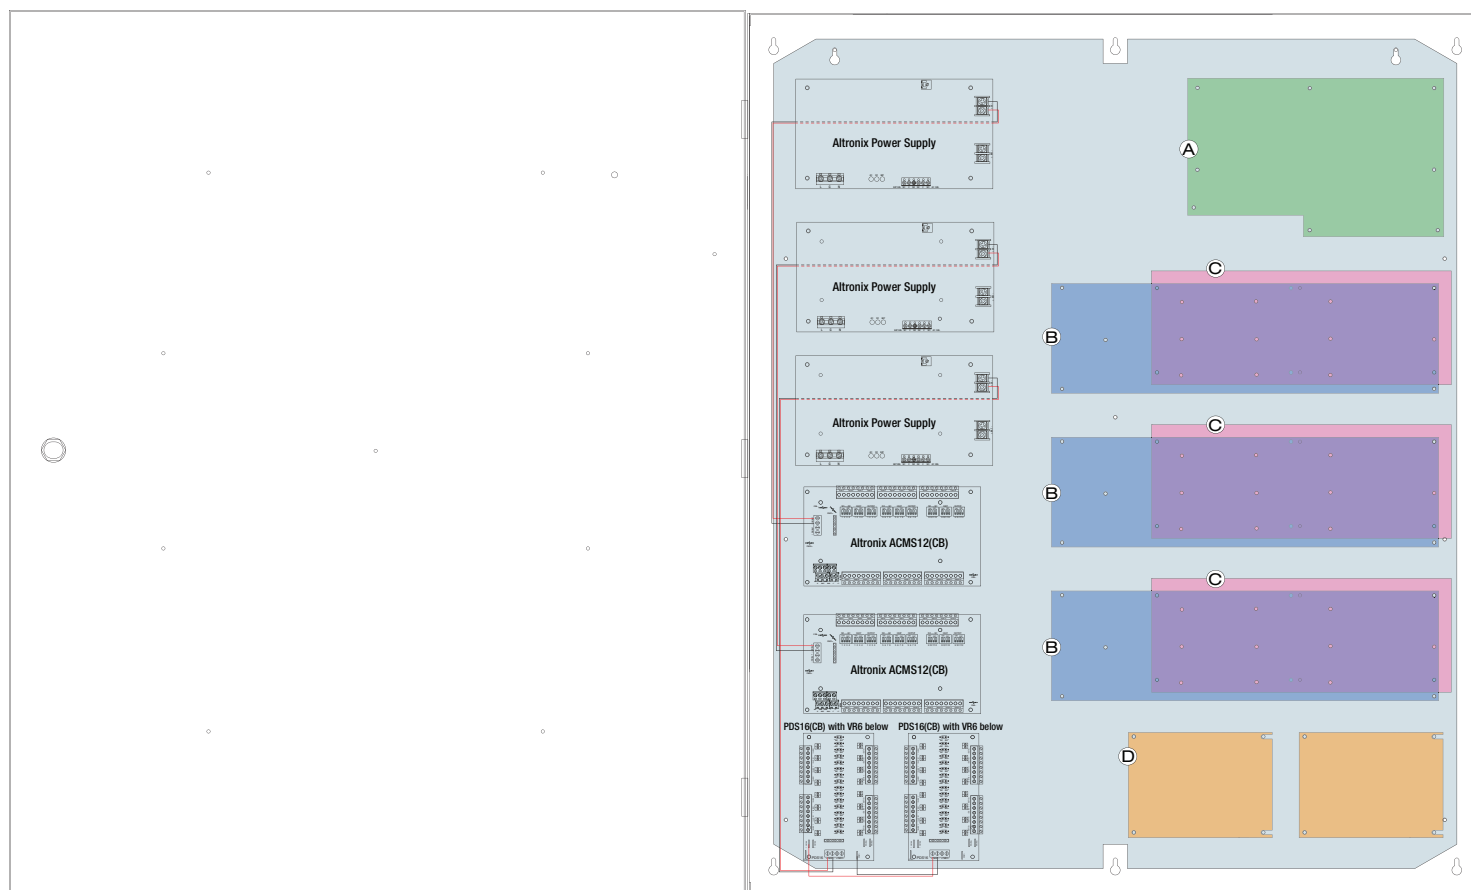

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8(CB), PDS16(CB), NetWay5A, NetWay5B, NetWay5P(Q) or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

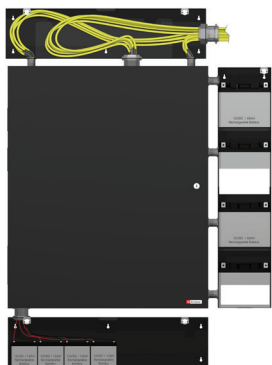**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

