


DIN Rail

Mounting Solution

Altronix offers a wide variety of standard 35mm DIN Rail for mounting compatible power supplies, sub-assemblies and relays.

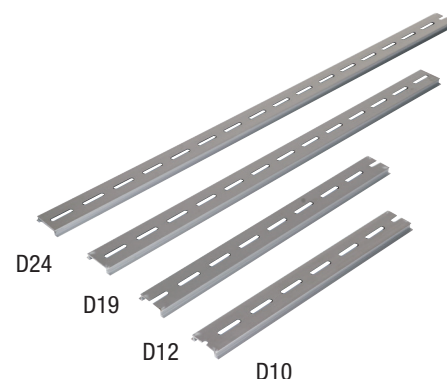

Key Features

- Standard 35mm slotted extruded aluminum DIN Rail
- Easy, fast installation saves time and labor
- 26 lb max strength
- Includes hardware (screws and spacers)

Specifications

Altronix Model	Quantity per Pack	Dimensions (W x L x H)	Weight	
			Product	Shipping
D10	1	1.385" x 10" x 0.3" (35.2mm x 254mm x 7.62mm)	0.08 lb. (0.04 kg)	0.1 lb. (0.05 kg)
D12	1	1.385" x 12" x 0.3" (35.2mm x 304.8mm x 7.62mm)	0.1 lb. (0.05 kg)	0.15 lb. (0.07 kg)
D19	1	1.385" x 19" x 0.3" (35.2mm x 482.6mm x 7.62mm)	0.15 lb. (0.07 kg)	0.17 lb. (0.08 kg)
D24	1	1.385" x 24" x 0.3" (35.2mm x 609.6mm x 7.62mm)	0.2 lb. (0.09 kg)	0.25 lb. (0.11 kg)

Accessories (order separately)



ST1, ST2, ST3 - Snap Tracks for Altronix Products

Altronix Snap Tracks allow for DIN Rail mounting of the following products:

ST1: RB5, RB1224, RBSN, RBST, RB30

ST2: RB7, RBOC7

ST3: AL624, SMP3, SMP5, 6030, 6062, PT724A

DIN Rail Dimensions and Drawing

