

## DS-2CD6626B-IZHRSx

2 MP Anti-Corrosion Bullet Camera

**DarkFighter™**

- **1/1.8" Progressive Scan CMOS**
- **1920 x 1080 Resolution @ 60 fps**
- **Minimum Illumination:**  
Color: 0.002 Lux @ (f1.2, AGC on)  
0 Lux with IR
- **IR Range:**  
2.8 to 12 mm Models: Up to 260 ft (80 m)  
8 to 32 mm Models: Up to 490 ft (150 m)
- **H.265+/H.265/H.264+/H.264**
- **120dB True WDR**
- **6 Behavior Analyses, 3 Exception Detections and Face Detection**
- **316L Stainless Steel Housing**
- **NEMA 4X and C5-M Anti-Corrosion Standards**
- **IP67 Protection**
- **24 VAC, 1.7 A**

The Hikvision DS-2CD6626B-IZHRSx Anti-Corrosion Network Bullet Camera contains a 316L stainless steel housing that is compliant with the strictest anti-corrosion ratings.

NEMA 4X and C5-M standards represent a very high level of environmental protection and indicate that the product can be safely installed and used in areas with almost permanent condensation and high airborne salinity.

The camera also provides high definition output and supports H.265+ video compression, which assures savings in bandwidth and storage.

Smart features, such as line crossing, intrusion, region entrance and exit, and face detection are also available.

**Available models:**  
DS-2CD6626B-IZHRS  
DS-2CD6626B-IZHRS8




# Specifications

DS-2CD6626B-IZHRS		DS-2CD6626B-IZHRS8	
<b>Camera</b>			
Image Sensor	1/1.8" progressive scan CMOS		
Minimum Illumination	Color: 0.002 lux @ (f/1.2, AGC on), 0 lux with IR		
Shutter Speed	1 to 1/100,000 s		
Slow Shutter	Supported		
Lens	2.8 - 12 mm, f/1.4; horizontal field of view, 90.1° to 31° Motorized zoom and autofocus	8 - 32 mm, f/1.4; horizontal field of view, 42.2° to 13.5° Motorized zoom and autofocus	
Auto-Iris	DC drive		
Day/Night	IR cut filter		
Digital Noise Reduction	3D DNR		
WDR	120 dB		
<b>Compression Standard</b>			
Video Compression	Main stream: H.265+/H.265/H.264+/H.264; sub stream: H.265/H.264/MJPEG; third stream: H.265/H.264		
H.264 Type	Baseline profile/main profile/high profile		
H.264+	Supported		
H.265 Type	Main profile		
H.265+	Supported		
Video Bit Rate	32 Kbps to 16 Mbps		
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM		
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)		
<b>Image</b>			
Maximum Resolution	1920 x 1080		
Main Stream	60 fps (1920 x 1080, 1280 x 960, 1280 x 720)		
Sub Stream	30 fps (704 x 480, 640 x 480, 352 x 240, 320 x 240)		
Third Stream	30 fps (1920 x 1080, 1280 x 960, 1280 x 720, 704 x 480, 640 x 480, 352 x 240, 320 x 240)		
Image Enhancement	BLC, HLC, defog, 3D DNR, EIS		
Image Setting	Rotate mode, saturation, brightness, contrast, etc., adjustable by client software or web browser		
Region of Interest	Supports 4 customized regions for each stream, and dynamic face tracking		
Target Cropping	Supported		
Day/Night Switching	Auto/schedule/triggered by alarm in		
Picture Overlay	Logo picture can be overlaid on video with 128 x 128 24-bit bmp format		
<b>Audio</b>			
Environment Noise Filtering	Supported		
Audio I/O	Supported		
Audio Sampling Rate	8 kHz/16 kHz		
<b>Smart Features</b>			
Behavior Analysis	Line crossing detection, intrusion detection, region entrance, region exiting, unattended baggage, object removal		
Line Crossing Detection	Audio exception detection		
Intrusion Detection	Four fixed regions for main stream and sub-stream		
Region Entrance	Enter a pre-defined virtual region from the outside		
Region Exit	Exit from a pre-defined virtual region		
Unattended Baggage	Objects left over in a pre-defined region, such as luggage and dangerous materials		
Object Removal	Objects removed from a pre-defined region, such as the exhibits on display		
Exception Detection	Scene change detection, defocus detection, audio exception detection		
Face Detection	A human face that appears in the image can be detected and trigger a linkage method		
<b>Network</b>			
Network Storage	Supports MicroSD/SDHC/SDXC card (128 GB), local storage and NAS (NFS,SMB/CIFS), ANR		
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflicted, illegal login, HDD full, HDD error		
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour		
General Function	One-key reset, anti-flicker, three streams, heartbeat, password protection, privacy mask, watermark, IP address filter		
Standard	ONVIF (PROFILE S, PROFILE G), ISAPI		
<b>Interface</b>			
Communication Interface	One RJ45 10M/100M/1000M self-adaptive Ethernet port		
Audio	One input, one output		
Alarm	One input, one output		
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB		
Reset Button	Yes		
Housing Interface	2 anti-corrosion inlets protected by a metal hose		
<b>General</b>			
Operating Conditions	-40° to 140° F [-40° to 60° C]; humidity 95% or less (non-condensing)		
Power Supply	24 VAC, 1.7 A, terminal block		
Power Consumption	Maximum 40 W		
Material	316L stainless steel		
Anti-Corrosion Standard	C5-M, NEMA 4X		
Ingress Protection	IP67		
IR Range	Up to 260 ft (80 m)	Up to 490 ft (150 m)	
Wiper	Supported		
Heater	Supported		
Dimensions	18.6" x 7.1" x 8" (472 mm x 180 mm x 203 mm)		
Weight	24.14 lbs (10.95 kg)		

## Accessories (not included)



## Dimensions

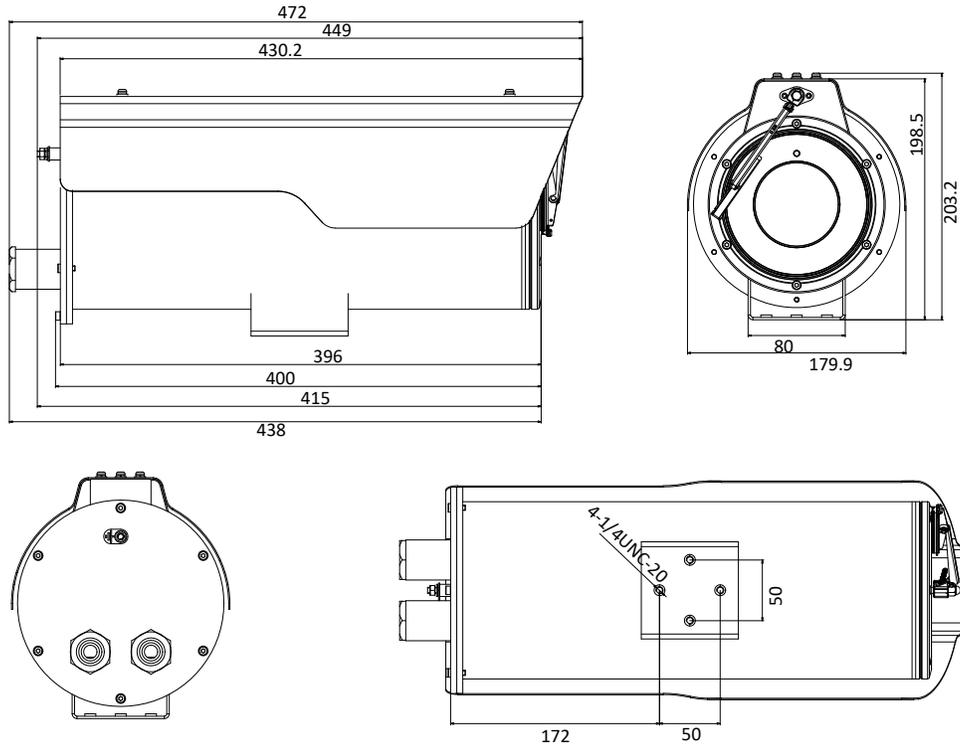

Unit: mm (inch)