

# EL-7007RX\*

## LED Emergency Exit Sign




FEATURES	
Power (W)	2 W
Lamp Type	Straw LED
Input Voltage	120/277 VAC
Frequency	60 Hz
LED Type	Straw LED
Battery Type	Ni-cd
Working Time	90 Minutes
Charging Time	15-24 Hours



### DESCRIPTION

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall, side and ceiling mounting
- Input Voltage: 120/277VAC 60Hz
- Super bright SMD LED
- Nickel Cadmium Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time:  $\geq 90$  minutes
- Conversion time:  $< 0.2$  second
- IP Class: IP20
- Operating Temperature:  $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

### TECHNICAL DRAWING

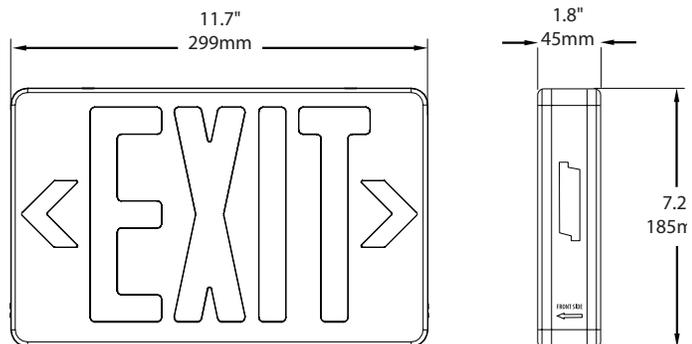

### INCLUDED PICTOGRAMS

\*Available in:

- Spanish (EL-7007RS)
- Green (EL-7007GX)

