Securitron® EPT Electrical Power Transfer

Concealed, tamper resistant, flexible power and data transfer



The EPT Electric Power
Transfer provides
concealed, secure
power and data
conduit between
a frame and door,
transmitting power
to electrified locks,
exit bars and more.

Its durable stamped steel housing and flexible spring steel conduit make the EPT suitable for most types of swinging doors with butt or continuous hinges or pivot hinges up to 3/4" offset. The EPT-SC accommodates swing-clear hinges and most pivot hinges.

Features

Standard Features

- · Installs in the door and frame edges
- Flexible steel shield protects wire bundles up to 5/16" thick
- Works with almost any type butt hinge, continuous hinges and some pivot hinges.
- Rounded mounting tabs
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

•

Optional Features

- **EPT** for standard hinges and pivot hinges less than 3/4" offset
- EPTL for extended length up to 5" center to center
- EPT-SC for swing-clear hinges or pivot hinges with larger offset; not for use with center pivot doors
- EL Models are ElectroLynx® compatible including 12-22 AWG wires, ElectroLynx® connectors





Certifications UL 10C Listed

- CAN4-S104 Listed
- UL 634 Listed (EL-EPT/ EL-EPTL)

Specifications

- ULC/ORD-C634 (EL-EPT/EL-EPTL)
- ANSI/SDI-BHMA A250.13 (+/- 60 PSF) Windstorm Listed


Dimensions

- EPT Housing: 12-3/4"L x 7/8" W x 11/16" D
- **EPTL Housing:** 21-3/8"L x 7/8" W x 11/16"D
- Interior Flex Shield: 3/8" [9.5mm]

Shipping Weight

- EPT: 0.75 lbs [0.34kg]
- EPTL: 1.20 lbs [0.54kg]
- EPT-SC: 1.25 lbs [0.57kg]
- EL-EPT: 0.75 lbs [0.34kg]
- EL-EPTL: 1.20 lbs [0.54kg]
- EL-EPT-SC: 1.25 lbs [0.57kg]

Dimensions

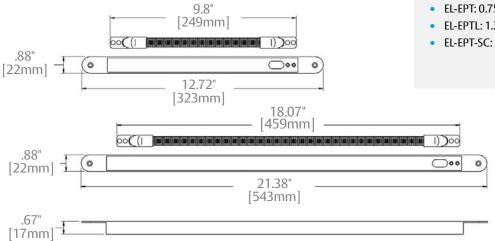

How to Order

Wire Connectors	Shape	Door Swing
EL	– EPT	– SC
(blank) No Connectors	EPT 10" Cord	(blank) Standard Swing
EL Electrolynx Connectors	EPTL 18" Cord	SC Swing Clear / Pivots
		C5E 9 Wires