


FMSMFA1010M Cable Assemblies - FM MPO TRUNK ASSEMBLY

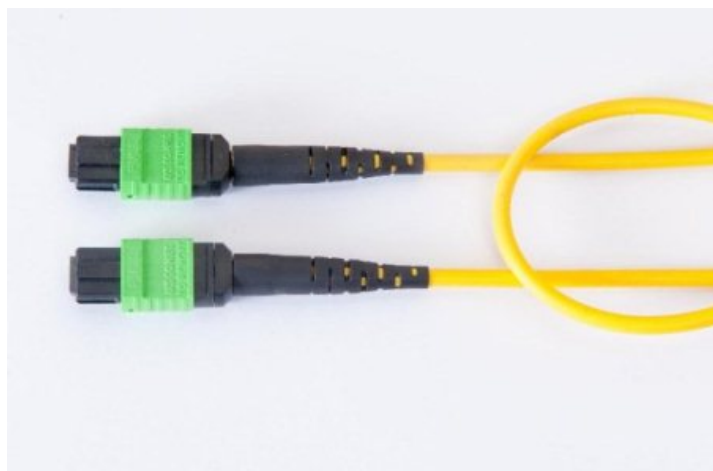

For more Information
please call

1-800-Belden1

General Description:

FX MPO TRUNK, OS2, MPO-12(FEMALE TO FEMALE), TYPE-A, 1 MPO (12 FIBERS), 10 M, OFNP, MINI-DISTRIBUTION (3.0MM SUB-UNITS), YELLOW JACKET

Usage (Overall)

Suitable Applications:	Data Centers, Main Equipment Rooms, Telecommunications Rooms
Related Parts:	FX Ultra & Ultra HD Cassettes and Frames, FX Manager Connector Modules

Multi Conductor**Physical Characteristics****Overall Cabling**

Overall Cabling Fillers:	Refer to cable Technical Specifications
---------------------------------	---

Overall Diameter

Overall Nominal Diameter:	0.118 in.
----------------------------------	-----------

Physical Characteristics (Connectivity)**Fiber Type**

Fiber Type:	SM, (OS2)
--------------------	-----------

Materials**Materials:**

Description	Type	Material	Color
Connectors at both ends	MPO Female	Plastic	Green
Boots at both ends		Rubber	Black

Wiring Scheme

Wiring Scheme:	TIA/EIA 568-C.3
-----------------------	-----------------

Weight

Weight:	1.290 lbs.
----------------	------------

Packaging

Packaging:	Individually packaged
-------------------	-----------------------

Mechanical Characteristics (Connectivity)

Storage Temperature Range:	-10°C To +60°C
Operating Temperature Range:	-10°C To +60°C

Environmental/Mechanical Characteristics:

Test (Method)	TIA 568-C.3
Humidity (FOTP-5)	90-95% @ 40°C for 4 days
Temperature Life (FOTP-4)	60°C for 4 days
Cable Retention (FOTP-6)	5.0 kg @ 0 deg.
Durability (FOTP-21)	500 cycles
Twist (FOTP-36)	1.5 kg for 10 cycles
Flex (FOTP-1)	0.5 kg @ 90° to -90° for 100 cycles
Low Temperature (FOTP-188)	-10°C for 4 days

Overall Length Tolerances:

Range	Tolerance	Range	Tolerance	Range	Tolerance
-------	-----------	-------	-----------	-------	-----------

FMSMFA1010M Cable Assemblies - FM MPO TRUNK ASSEMBLY

Sx & Dx Patchcord	Sx & Dx Patchcord	MPO Trunk	MPO Trunk	Multi-Fiber Cable Assembly	Multi-Fiber Cable Assembly
0 to 2 meters	+0.2 / -0 meter	0 to 2 meters	+0.2 / -0 meter	0 to 2 meters	+0.2 / -0 meter
2.1 to 5.0 meters	+0.3 / -0 meter	2.1 to 5.0 meters	+0.3 / -0 meter	2.1 to 5.0 meters	+0.3 / -0 meter
5.1 to 40 meters	+0.4 / -0 meter	5.1 to 20 meters	+0.4 / -0 meter	5.1 to 20 meters	+0.4 / -0 meter
Over 40.1 meters	+ 1.0% / -0%	Over 20.1 meters	+ 1.0% / -0%	Over 20.1 meters	+ 1.3 / -0 meter

Applicable Specifications and Agency Compliance (Overall)

Applicable Standards & Environmental Programs

UL Rating: Plenum

EU Directive 2011/65/EU (ROHS II): Yes

EU RoHS Compliance Date (mm/dd/yyyy): 01/01/2013

MIL Order #39 (China RoHS): Yes

Safety Listing: ACA, Bi-national Standard Listed

Suitability

Suitability - Indoor: Yes

Transmission Characteristics (Connectivity)

Optical Connector Performance:

Description	OM1 (62.5 µm)	OM2 (50 µm)	OM3 (50 µm)	OM4 (50 µm)	OS2 (Singlemode) UPC	OS2 (Singlemode) APC
Maximum IL (dB) SingleFiber Connector LC - SC - ST	0.25 dB	0.25 dB	0.25 dB	0.15 dB	0.35 dB	0.35 dB
Maximum RL (dB) SingleFiber connector LC - SC - ST	-25 dB	-25 dB	-25 dB	-25 dB	-55 dB	-65 dB
Maximum IL (dB) MultiFiber Connector MPO	0.5 dB	0.5 dB	0.35 dB	0.2 dB	-	0.75 dB
Maximum RL (dB) MultiFiber Connector MPO	-25 dB	-25 dB	-25 dB	-25 dB	-	-60 dB

Electrical Characteristics (Overall)

Notes (Overall)

Product Family

Put Ups and Colors:

Item #	Putup	Ship Weight	Color	Notes	Item Desc
FMSMFA1010M	1 EA	0.208 KG			FMT OS2 MPO12(F-F) A 12F 10M

Revision Number: 0 Revision Date: 02-06-2015

© 2016 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.