


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

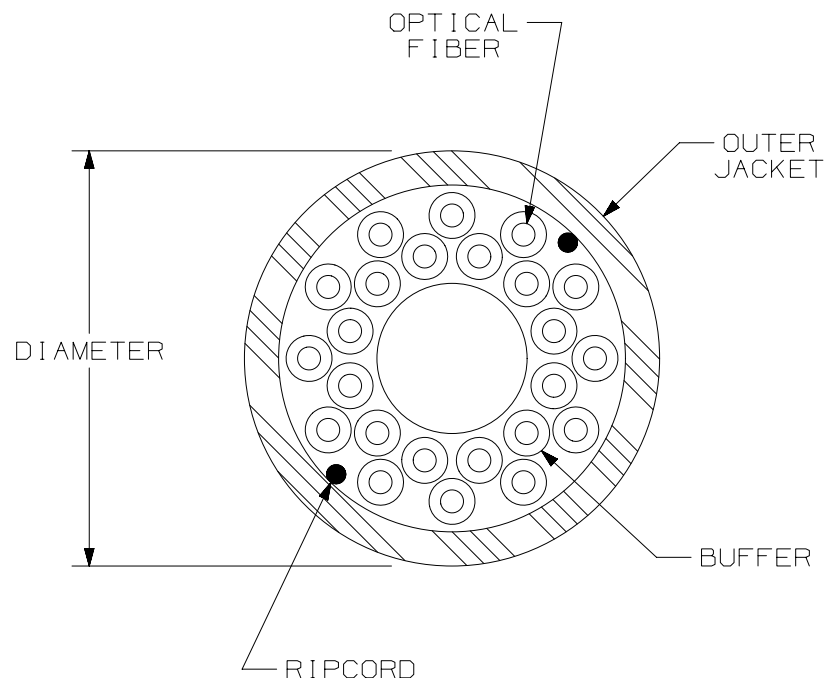


PLENUM - SEE TABLE (SHEET 2) FOR PART NUMBERS			
TENSILE LOAD		BEND RADIUS	
INSTALLATION	OPERATION	INSTALLATION	OPERATION
660 N (148 lbf)	198 N (44.4 lbf)	153mm (6.0 in)	77mm (3.0 in)
TEMPERATURE			
INSTALLATION	OPERATION	STORAGE	
32° F TO 140° F 0° C TO 60° C	32° F TO 176° F 0° C TO 80° C	-40° F TO 176° F -40° C TO 80° C	

RISER - SEE TABLE (SHEET 2) FOR PART NUMBERS			
TENSILE LOAD		BEND RADIUS	
INSTALLATION	OPERATION	INSTALLATION	OPERATION
660 N (148 lbf)	198 N (44.4 lbf)	153mm (6.0 in)	77mm (3.0 in)
TEMPERATURE			
INSTALLATION	OPERATION	STORAGE	
14°F TO 140°F -10°C TO 60°C	-4°F TO 176°F -20°C TO 80°C	-40°F TO 176°F -40°C TO 80°C	

NOTES :

1. DIAMETER DIMENSION SHOWN FOR REFERENCE ONLY.
2. CABLE SUPPLIED IN MINIMUM LENGTHS OF 1000 FT (304 METERS).
3. FOR PART NUMBERS AND LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
4. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

PART NUMBER					SEE TABLE ON SHEET 2.				
TITLE									
OPTI-CORE 24 FIBER DISTRIBUTION CABLE W/900um TIGHT BUFFER									
CUSTOMER DRAWING									
ITEM REVISION NAME									
M02055BG/01									
DATASET FILE NAME									
M02055BG_DC/01A									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .010 [.3] .XX ± .03 [.8] ANGLES ±					MATERIAL:				
					THIRD ANGLE PROJECTION				
DRAWING NUMBER:					02055 - 40				
DRAWN BY		DATE		CHK		SCALE		SIZE	
MC		8-24-12		WMA		NONE		SHT 1 OF 2	
								A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	FIBER TYPE	ATTENUATION	JACKET COLOR	CABLE DIAMETER	WEIGHT
FSDP924Y	SINGLEMODE 9/125 OS1/OS2	0.75 dB/km @ 1310nm 0.75 dB/km @ 1550nm	YELLOW	7.6mm [.30 in]	42 lbs/kft[62 kg/km]
FSDR924Y				8.1mm [.32 in]	43 lbs/kft[64 kg/km]
FSDP524Y	MULTIMODE 50/125 OM2	3.5 dB/km @ 850nm 1.5 dB/km @ 1300nm	ORANGE	7.6mm [.30 in]	42 lbs/kft[62 kg/km]
FSDR524Y				8.1mm [.32 in]	43 lbs/kft[64 kg/km]
FSDP624Y	MULTIMODE 62.5/125 OM1	3.5 dB/km @ 850nm 1.5 dB/km @ 1300nm	ORANGE	7.6mm [.30 in]	42 lbs/kft[62 kg/km]
FSDR624Y				8.1mm [.32 in]	43 lbs/kft[64 kg/km]
FODPX24Y	MULTIMODE 50/125 OM3	3.5 dB/km @ 850nm 1.5 dB/km @ 1300nm	AQUA	7.6mm [.30 in]	42 lbs/kft[62 kg/km]
FODRX24Y				8.1mm [.32 in]	43 lbs/kft[64 kg/km]
FODPZ24Y	MULTIMODE 50/125 OM4	3.5 dB/km @ 850nm 1.5 dB/km @ 1300nm	AQUA	7.6mm [.30 in]	42 lbs/kft[62 kg/km]
FODRZ24Y				8.1mm [.32 in]	43 lbs/kft[64 kg/km]

PART NUMBER		SEE TABLE	
TITLE			
OPTI-CORE 24 FIBER DISTRIBUTION CABLE W/900um TIGHT BUFFER			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02055BG/01	
DATASET FILE NAME		M02055BG_DC/01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.X ± .XX ± .03 [.8] .XXX ± .010 [.3] ANGLES ±			
THIRD ANGLE PROJECTION		DRAWING NUMBER: 02055 - 40	
DRAWN BY MC	DATE 8-24-12	CHK WMA	SCALE NONE
SHT 2 OF 2			SIZE A