

# SUPPLEMENTAL SAFETY.

Customize your safety system for your community with these add-ons.




## MONITORED THROUGH-BEAM PHOTO EYES LMTBUL

Cover a greater distance and ensure high performance in challenging environments with enhanced through-beams, a wider polarized beam and a heater. Max. range: 90 ft.

## MONITORED WIRELESS EDGE KIT LMWEKITU

Eliminate wires between LiftMaster® Monitored Resistive Edges and Gate Operators via a low-energy Bluetooth® connection. Max. range: 130 ft.\*

\*Wireless kit for up to 4 transmitters and 2 resistive edges per transmitter.

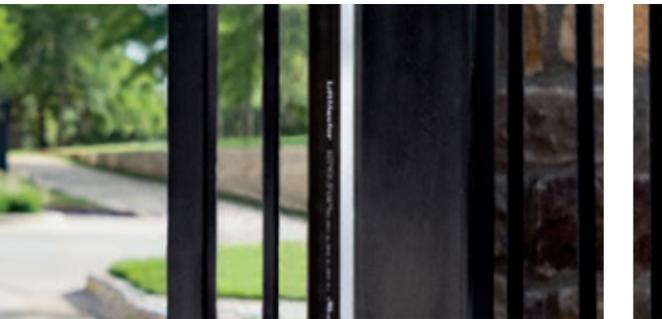

## MONITORED SAFETY ENTRAPMENT EDGES

Get a precise fit for your gate with a full line of Small, Large and Wraparound Profile Edges.

## WIRELESS KEYPADS

Use constant pressure override to control gate operator if safety devices fault but are free of obstructions. Hold Open/Party Pass enabled with gate operator firmware 4.2 or higher.



# KEEP THEM MOVING.

Protect your community 24/7 with safety solutions driven by a higher standard.



## LEARN MORE.

 Contact Your LiftMaster® Dealer

 Find a Dealer at [LiftMaster.com](https://www.liftmaster.com)

 800.323.2276

© 2018 LiftMaster All Rights Reserved  
300 Windsor Drive, Oak Brook, IL 60523  
LiftMaster.com  
© 2018 Bluetooth SIG, Inc. All rights reserved.  
UL® and the UL logo are trademarks of UL LLC © 2018 All Rights Reserved.  
LMPAENBRUL325 5/18

**LiftMaster**

PRODUCT BROCHURE  
UL® 325 GATE SAFETY SYSTEMS

**LiftMaster**

# ALWAYS A SAFE BET.

With LiftMaster®, you know your community is protected—right out of the gate.

As the only brand with its own complete line of safety solutions, we make it simple to meet the industry's changing standards. Plus, we continually offer training to our dealers in gate safety best practices.



### Reduced Liability

Our full range of add-on safety entrapment devices gives you options to protect every entrapment zone.



### Advanced Sensors

New, state-of-the-art photo eyes are engineered to stay aligned, featuring a wider polarized beam and a heater.



### Complete Confidence

Maximize uptime and minimize complaints with the reliability of a seamless system.



Ask your installer to follow UL® 325 and ASTM F2200 safety standards to ensure that your gate system is safe.



Monitored Retro-Reflective Photo Eye LMRRUL

NEW

UL 325 Listed Slide Gate Operators

Monitored Small Profile Resistive Edge



### SAFETY IS OUR STANDARD

Our complete line of operators and safety devices meet UL® 325 Standards to keep your property safe.



### ALL-WEATHER UPTIME

Featuring a wider beam and a built-in heater, our new photo eye is engineered to maintain alignment in a variety of environments.





### INCONSPICUOUS DESIGN

Maintain an upscale appearance with low-profile system components for all applications.

## THE BOTTOM LINE:



	VALUE
<b>Complete system:</b> LiftMaster monitored safety devices are engineered to work seamlessly with our gate operators to maximize uptime.	PEACE OF MIND
<b>Innovative components:</b> Resilient sensors minimize downtime.	RESIDENT SATISFACTION
<b>Industry leader:</b> LiftMaster continuously partners with industry organizations to promote gate safety.	UNQUESTIONABLE SAFETY

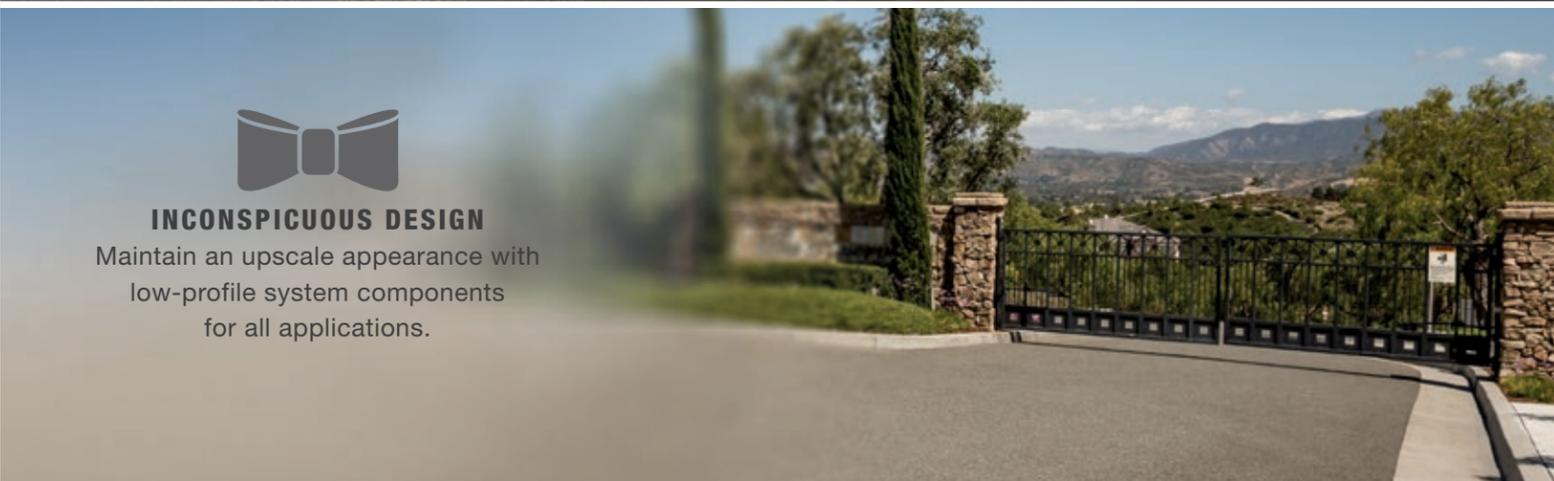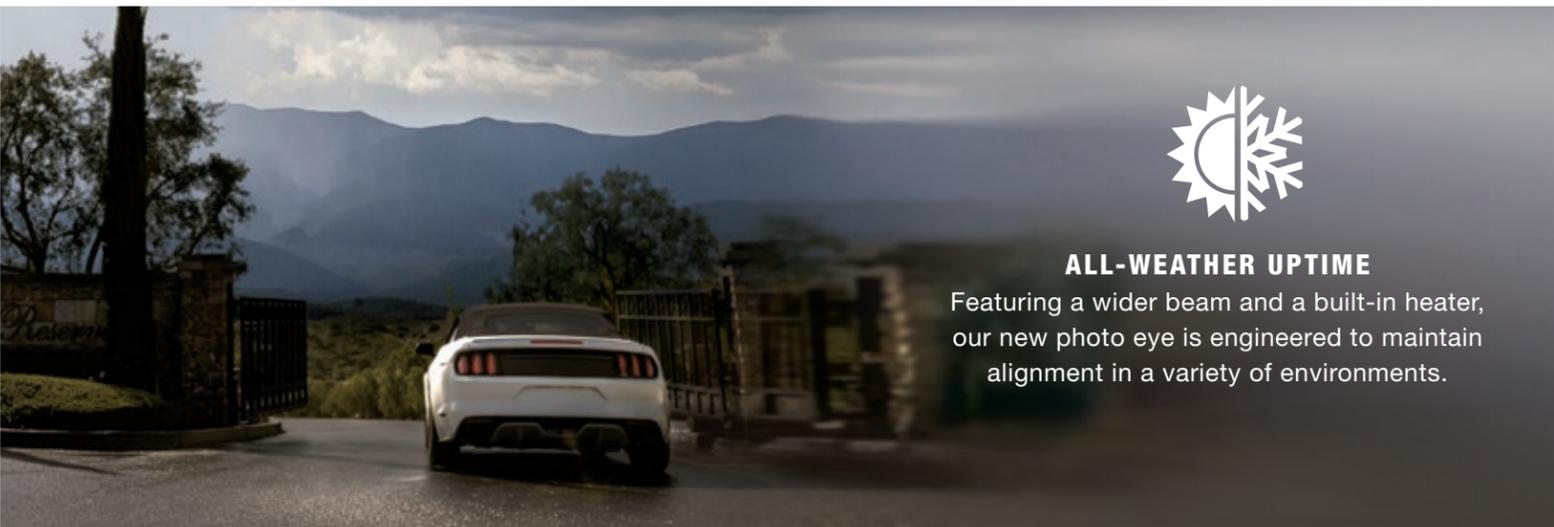

“Resident safety is always a priority. LiftMaster® makes it easier.”