

NS Plug & Play Wall Mount Network Video Recorder

N4WNS, N8WNS, N16WNS

Base Wall Mount Model

N4WNSM, N8WNSM, N16WNSM

Wall Mount with Built-In Monitor

N4WNSP, N8WNSP, N16WNSP


Wall Mount with Built-In PoE

N4WNSPM, N8WNSPM, N16WNSPM

Wall Mount with Built-In PoE and Monitor

Storage

1TB – **9TB** (see last page for model numbers)

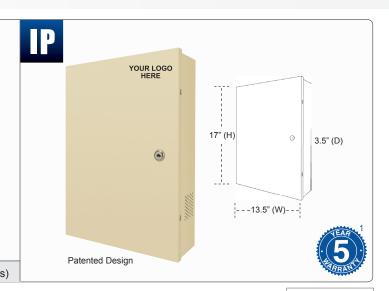

Key Features



Camera: quickly discover and install all Speco IP cameras

Setup: for quick setup of general settings

Network: network setup and port forwarding

Record: quickly setup recording resolutions and recording type

Search: quickly search for events from thumbnails

Copy: quickly copy what you are playing onto a USB flash drive

- Supports all H.264 compression profiles (baseline, main and high)
- Free U.S.-Based DDNS Server Access
- 5 year limited warranty
- · Custom branding

Additional Features



- 8 and 16 channel NVR supports up to 5MP resolution on channel 1
- 4 channel NVR supports up to 3MP resolution on channel 1
- · Conformant with ONVIF profile S
- · A patented NVR solution that easily mounts in equipment closets or electrical rooms for covert installations
- Digital Deterrent® for triggering audio message via motion detection or sensor

- · 2-way audio communication
- Full HD (1920 x 1080) recording and playback
- · Built-in S.M.A.R.T. Technology (Self-Monitoring, Analysis and Reporting Technology for HDD)
- 4/8/16 channel selectable local or IP camera audio recording
- Remote monitoring / recording / playback / configuration / software upgrades and PTZ control via internet
- PC and MAC® compatible

Suggested Cameras







O2iB8M



O2D60M



S.M.A.R.T.

O2D7M

Optional Accessories



IRRPTKIT IR Repeater Kit



POF4SW6 4 PoE Port 10/100 802 3af/ at Switches (WNS / WNSM only)



POF8SW9 8 PoE Port 10/100 802 3af/ at Switches (WNS / WNSM only)



16 PoE Port 10/100 802 3af/ at Switches (WNS / WNSM only)

Effective on all new purchases as of 2/1/17. Limited Warranty/Hard drives excluded. 2Certified I-View Now Ready in 4 and 8 channel NSP NVRs only. ONVIF is a trademark of Onvif, Inc. Visit www.specotech.com/onvif.html for latest ONVIF support. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. iPhone is a trademark of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 7/5/17









	ITEM		WNS / WNSM / WNSP / WNSPM		
		IP Channel	4	8	16
Video	Input	Video Loss Check		Yes	
		HDMI	1920x1080, 1280x720		
	Output	VGA	1920x1080, 1280x720		
		CVBS	1920X1080, 1280X720 Main		
	to a		4 F 4 ID 4 F		40 5 - 1 - 1 40 10 1 - 1 4 5 1
Audio	Input & Output		4 line input, 4 IP input, 1 line output	8 line input, 8 IP input, 1 line output	16 line input, 16 IP input, 1 line out
	Audio Codec			G.711	T
Alarm	Sensor Input (NC/NO Selectable)		4 local, 4 IP 4 local, 8 IP 4 local, 16 IP		
	Alarm Output		1		
Serial	RS-485	PTZ		1	
Recording	Compression		H.264 (baseline, main, high profile)		
	Multi-Operation		Quadplex (play, record, network, backup)		
	Resolution	1920x1080	120fps	240fps	480fps
		1280x720	120fps	240fps	480fps
	Record	ling Mode	Continuous / Schedule / Me	otion / Sensor / Manual / Continuous + S	Sensor / Continuous + Motion
	Motion Detection		Motion detection configured via IP camera		
	Recording by Channel's Resolution		Yes		
	Pre-Recording		Max. 20 minutes		
	Post Recording		Max. 60 seconds		
	Multi-I	Decoding	1, 4	1, 4, 8	1, 4, 9, 16
Playback		ch Mode	EZ	Z Search, Date/Time, Event, Archive and	Log
		Interface Type	Serial ATA		
	HDD -	Capacity of 1 HDD	3TB		4TB
		Internal HDD Number	-	3 (NS) / 2 (NSP)	
		e-SATA	1		
Storage	Backup	USB Flash Drive			
		USB External HDD	Video & Still Image		
			Video & Still Image		
	Network USB Port		Video & Still Image		
			3 (NS), 2 (NSP)		
User I/F	Menu Display		GUI		
	Input Method		IR Mouse, Keyboard Controller		
Network	Interface		10/100 base-TX ethernet 10/100/1000 base-TX ethernet		
	Streaming			Depends on profile	
	IP Camera Throughput		20 Mbps 40 Mbps		
Network Access	Mobile Viewer		Live, Search, PTZ, 2-Way Audio		
	PC Web Viewer		Internet Explorer, Chrome, Firefox, Safari (Live, Search, Backup, PTZ, Remote Setup)		
	PC Client		SpecoTech Multi-Client Viewer and SecureGuard® VMS (Live, Search, Backup, PTZ, Remote Setup)		
	MAC Client		Speco Client for MAC and SecureGuard® VMS (Live, Search, Backup, PTZ, Remote Setup)		
	Digital Deterrent®		Default + up to 8 custom audio files		
	Digital Zoom		Yes		
	Digita		Yes		
		ight Savings)		res	
	DLS (Dayl	ight Savings) Record		Yes	
Footuse	DLS (Dayl				
Features	DLS (Dayl EZ I S.M	Record		Yes	
Features -	DLS (Dayl EZ I S.M Interr	Record I.A.R.T		Yes Yes	
Features	DLS (Dayl EZ I S.M Interr Multi-L	Record I.A.R.T		Yes Yes Yes	
Features	DLS (Dayl EZ I S.M Interr Multi-L Dynai	Record I.A.R.T nal Beep .anguage		Yes Yes Yes English / French / Spanish	
Features	DLS (Dayl EZ I S.M Interr Multi-L Dynai	Record I.A.R.T Ial Beep I.anguage		Yes Yes Yes Yes English / French / Spanish Yes (free Speco DDNS)	
Features	DLS (Dayl EZ I S.M Interr Multi-L Dynai SW L NTP (Networ	Record I.A.R.T I.A.R.T I.A.R.T I.A.R.T I.A.R.D I.A.		Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade	
	DLS (Dayl EZ I S.M Interr Multi-L Dynar SW U NTP (Networ	Record I.A.R.T Ial Beep anguage mic DNS Jpgrade k Time Protocol) Standard	4 Ch. 48W	Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade Yes All ch. 802.3af	1. 96W
Features Power Source	DLS (Dayl EZ I S.M Interr Multi-L Dynan SW U NTP (Networ) Poe S	Record I.A.R.T Inal Beep I.A.R. T I.A.R. T	4 Ch. 48W WNS / WNSM: 12VDC, 5A	Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade Yes All ch. 802.3af	1. 96W 2VDC - 5A I 48VDC - 1A
Power Source	DLS (Dayl EZ I S.M Interr Multi-L Dynai SW L NTP (Networ PoE S Total Po	Record A.R.T all Beep anguage mic DNS Jpgrade k Time Protocol) Standard DE Budget pply Voltage	4 Ch. 48W WNS / WNSM: 12VDC, 5A	Yes Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade Yes All ch. 802.3af 8 CI WNSP / WNSPM: 1:	n. 96W 2VDC, 5A 48VDC, 1A
Power Source Allowable	DLS (Dayl EZ I S.M Interr Multi-L Dynai SW U NTP (Networ PoE S Total Po Power Su Operating Temperature / I	Record I.A.R.T I.A.		Yes Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade Yes All ch. 802.3af 8 CI WNSP / WNSPM: 1. 41° F – 104° F / 20% – 80% RH	
Power Source Allowable	DLS (Dayl EZ I S.M Interr Multi-L Dynai SW L NTP (Networi PoE S Total Po Power Su Operating Temperature / I wable Storage Temperature	Record I.A.R.T I.A.	WNS / WNSM: 12VDC, 5A	Yes Yes Yes Yes English / French / Spanish Yes (free Speco DDNS) USB and remote software upgrade Yes All ch. 802.3af 8 CI WNSP / WNSPM: 1:	2VDC, 5A 48VDC, 1A

Please note that specifications and unit exterior design are subject to change without notification.

Storage Specifications/Model Number Guide:

NS Wall Mount Network Video Recorder

speco technologies

