


**PoE201****56VDC/120W Power Supply/Charger**

Altronix PoE201 provides 120W for NetWay Spectrum switches with 1Gb SFP ports. It also features a built-in charger for sealed lead acid or gel type batteries.

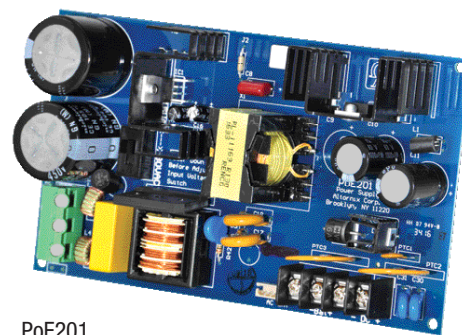

PoE201

**Specifications****Input**

Voltage 115VAC, 60Hz, 2.5A or  
230VAC, 50/60Hz, 1.3A

**Output**

Voltage 56VDC/120W.  
Current 2.2A continuous supply current.  
Maximum Power 120W total power.  
Integral surge protection.

**Back-up Battery (not included)**

Type Sealed lead acid or gel type.  
Charging Circuit 48VDC, 300mA.  
Failover Upon AC loss, instantaneous.

**Physical and Environmental****Dimensions (L x W x H)**

7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm).

Product Weight 0.7 lbs. (0.32 kg).

Shipping Weight 1.1 lbs. (0.5 kg).

**Temperature**

Operating (120W): -30°C to 75°C (-22°F to 167°F).

Storage -30°C to 85°C (-22°F to 185°F).

Relative Humidity 85% +/-5%.

BTU/Hr (approx.): 61 BTU/Hr.

Mounting hardware included.

**Also Available:****WayPoint562 -**


PoE201 56VDC Power Supply/Charger in a NEMA Rated Outdoor Enclosure

**Lifetime Warranty**

## PoE201


56VDC/120W Power Supply/Charger

### Typical Applications

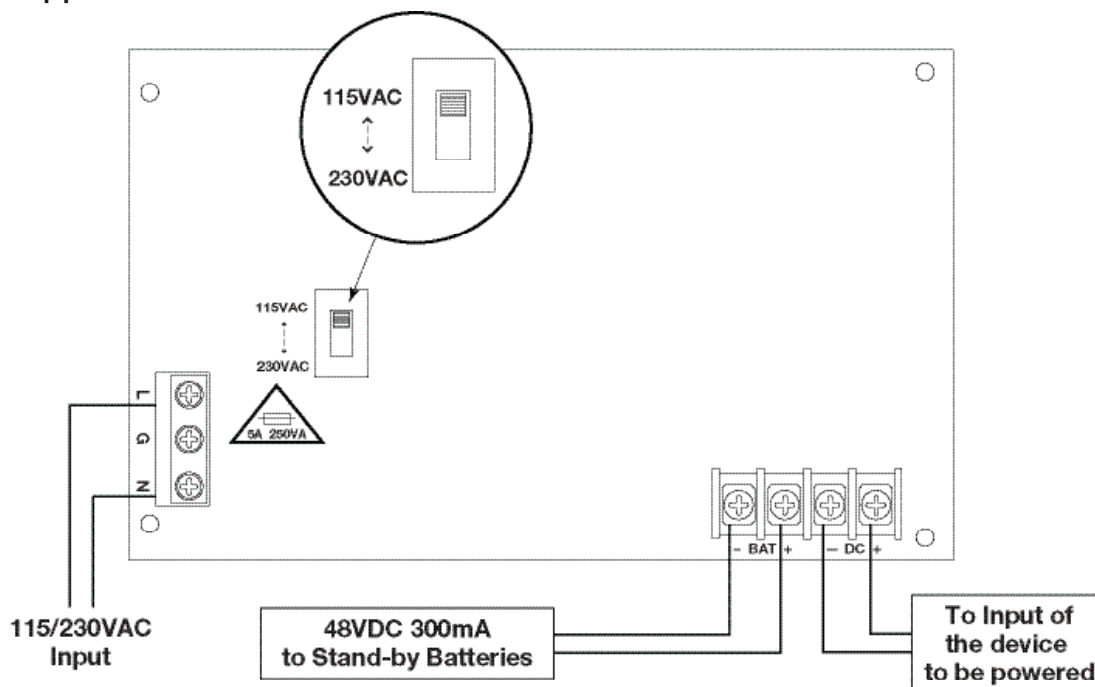

### Board Dimensions (L x W x H) and Drawing

7.0" x 4.0" x 1.375" (177.8mm x 101.6mm x 34.9mm)

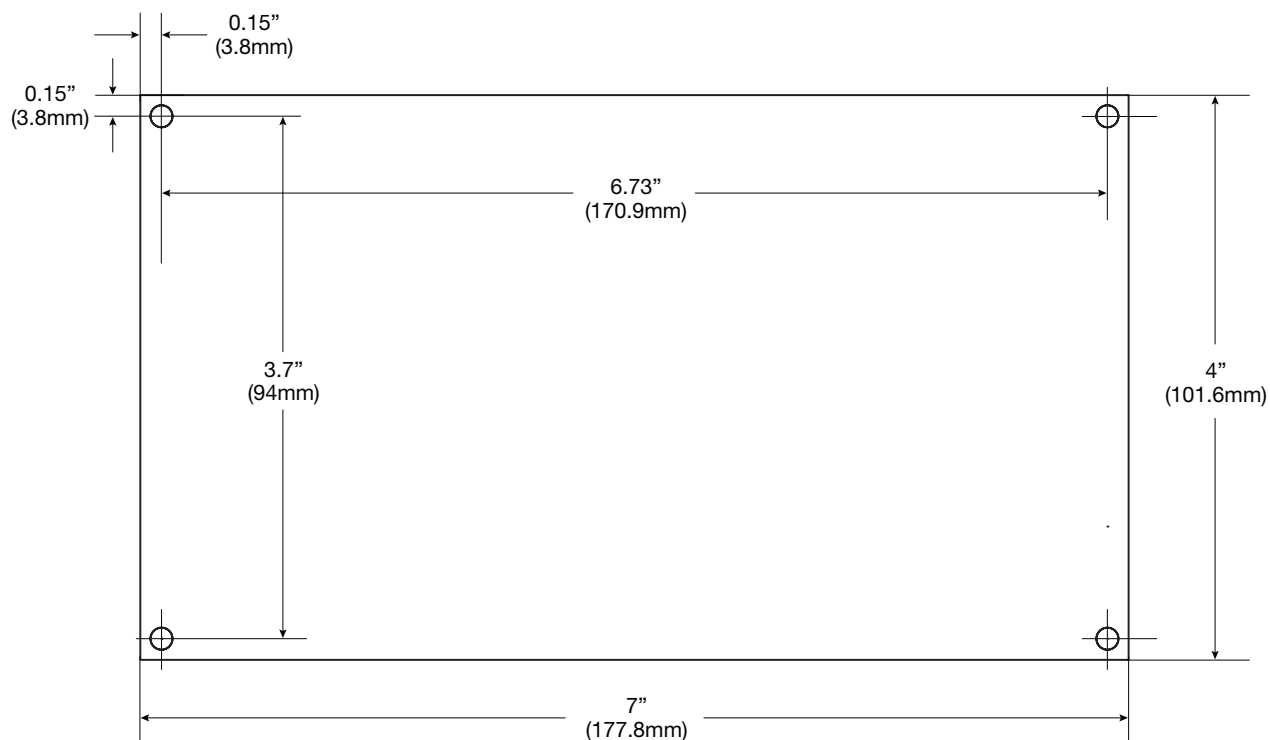

#### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)