


SCSU1208SLR Faceplates and Panels - FXU SPLITTER



For more
information
please call
1-800-Belden1

General Description: FX SPLITTER ULTRA CASSETTE, OS2, 1 SPLITTER, 2 X 08, SC/APC, LC/APC, REAR	
Usage (Overall)	
Suitable Applications:	FiberExpress Solutions, Backbone, Telecommunications Room, Main Distribution Room, Data Centers
Related Parts:	FX UHD & FXU Patch Panels, FX Patch Cords
Physical Characteristics (Connectivity)	
Capacity	
Max. Capacity:	8 Fibers (Output)
Access	
Front Connection:	1 inch Pullout
Termination Area:	Front
Dimensions	
Dimensions:	
Height (in.)	Width (in.)
1.500	4.500
Length (in.)	
9.080	
Materials	
Materials:	
Description	Type
Adapter Sleeve	Zirconia-Ceramic
Rear Connector Body	SC-Duplex w/ Internal Shutters
Front Connector Body	LC-Duplex w/ Internal Shutters
Cassette assy	Plastic - UL94V-0
Color	
Green	
Green	
Black	
Weight	
Weight:	0.500 lbs.
Packaging	
Packaging:	Individually packaged in a plastic shell, Shipped in cardboard box (14/box)
Mechanical Characteristics (Connectivity)	
Storage Temperature Range:	-10°C To +75°C
Operating Temperature Range:	-10°C To +60°C
Applicable Specifications and Agency Compliance (Overall)	
Applicable Standards & Environmental Programs	
EU RoHS Compliance Date (mm/dd/yyyy):	01/01/2013
Mil Order #39 (China RoHS):	EUP 50
Telecommunications Standards:	Telcordia GR-1209-CORE (splitters only), Telcordia GR-1221-CORE (splitters only)
Suitability	
Suitability - Indoor:	Yes
Transmission Characteristics (Connectivity)	
Transmission Specifications:	
Splitter Config.	IL (dB)
1 x 8	10.7
1 x 16	14.1
2 x 8	11.2
2 x 16	14.7
1 x 32	17.0
2 x 32	18.2
Uniformity (dB)	PDL (dB)
1.1	0.3
1.4	0.3
1.7	0.4
2.1	0.4
2.0	0.4
2.5	0.5
Directivity (dB)	RL (dB)
55	55
55	55
55	55
55	55
55	55
55	55
Notes (Overall)	
Product Family	

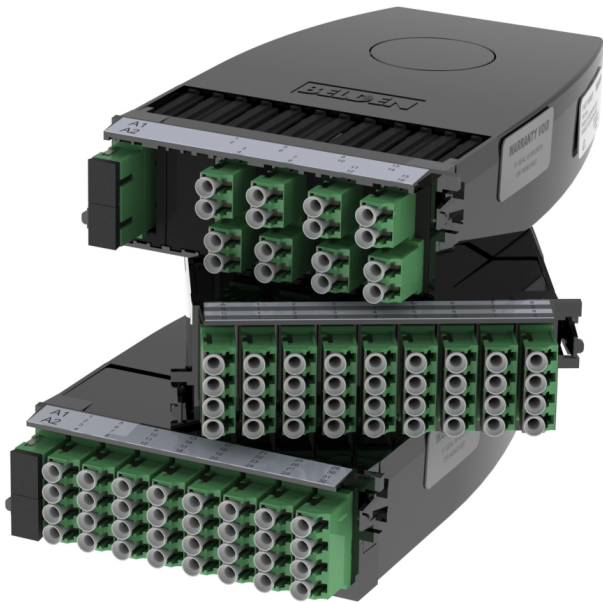

SCSU1208SLR Faceplates and Panels - FXU SPLITTER

Put Ups and Colors:

Item #	Putup	Ship Weight	Color	Notes	Item Desc
--------	-------	-------------	-------	-------	-----------

Revision Number: 0 Revision Date: 10-19-2016

© 2017 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.
Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.
All sales of Belden products are subject to Belden's standard terms and conditions of sale.