

**SMP3WP**

## Outdoor DC Power Supply/Charger

Altronix SMP3WP DC Outdoor Power Supply/Charger provides 12VDC or 24VDC and is designed to be conveniently located where power is required. 16 GA steel enclosure finished with heat fused polyester powder is NEMA 4/4X, IP66-11 Rated for outdoor use. It features turn lock and integral flanges to simplify wall or pole mounting.



SMP3WP

**Specifications****Input**

Voltage 115VAC, 60Hz, 0.95A or  
230VAC, 50Hz, 0.6A

**Outputs**

Voltage 12VDC or 24VDC selectable  
Current 2.5A continuous supply current  
Other Short circuit and thermal overload protection  
Filtered and regulated

**Back-up Battery** *(not included, separate enclosure is required)*

Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous

**Indicators (LED)**

Input Input voltage is present  
DC Output Powered

**Agency Listings**

CE European Conformity

**Physical and Environmental**

NEMA 4 Rated enclosure for outdoor use

**Dimensions (H x W x D)**

Enclosure:  
12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)  
Shipping:  
18" x 14" x 10" (457.2mm x 355.6mm x 254mm)

**Weight (approx.)**

Product: 9.9 lb. (4.5 kg)  
Shipping: 11 lb. (5.0 kg)


**Temperature**

Operating: - 40°C to 60°C (- 40°F to 140°F)  
Storage: - 40°C to 70°C (- 40°F to 158°F)

**Relative Humidity** 85% +/- 5%

**BTU/Hr (approx.):**

12VDC: 15 BTU/Hr.  
24VDC: 31 BTU/Hr.

**Accessories** (order separately)

PMK1

**PMK1 -  
Pole Mount Kit**

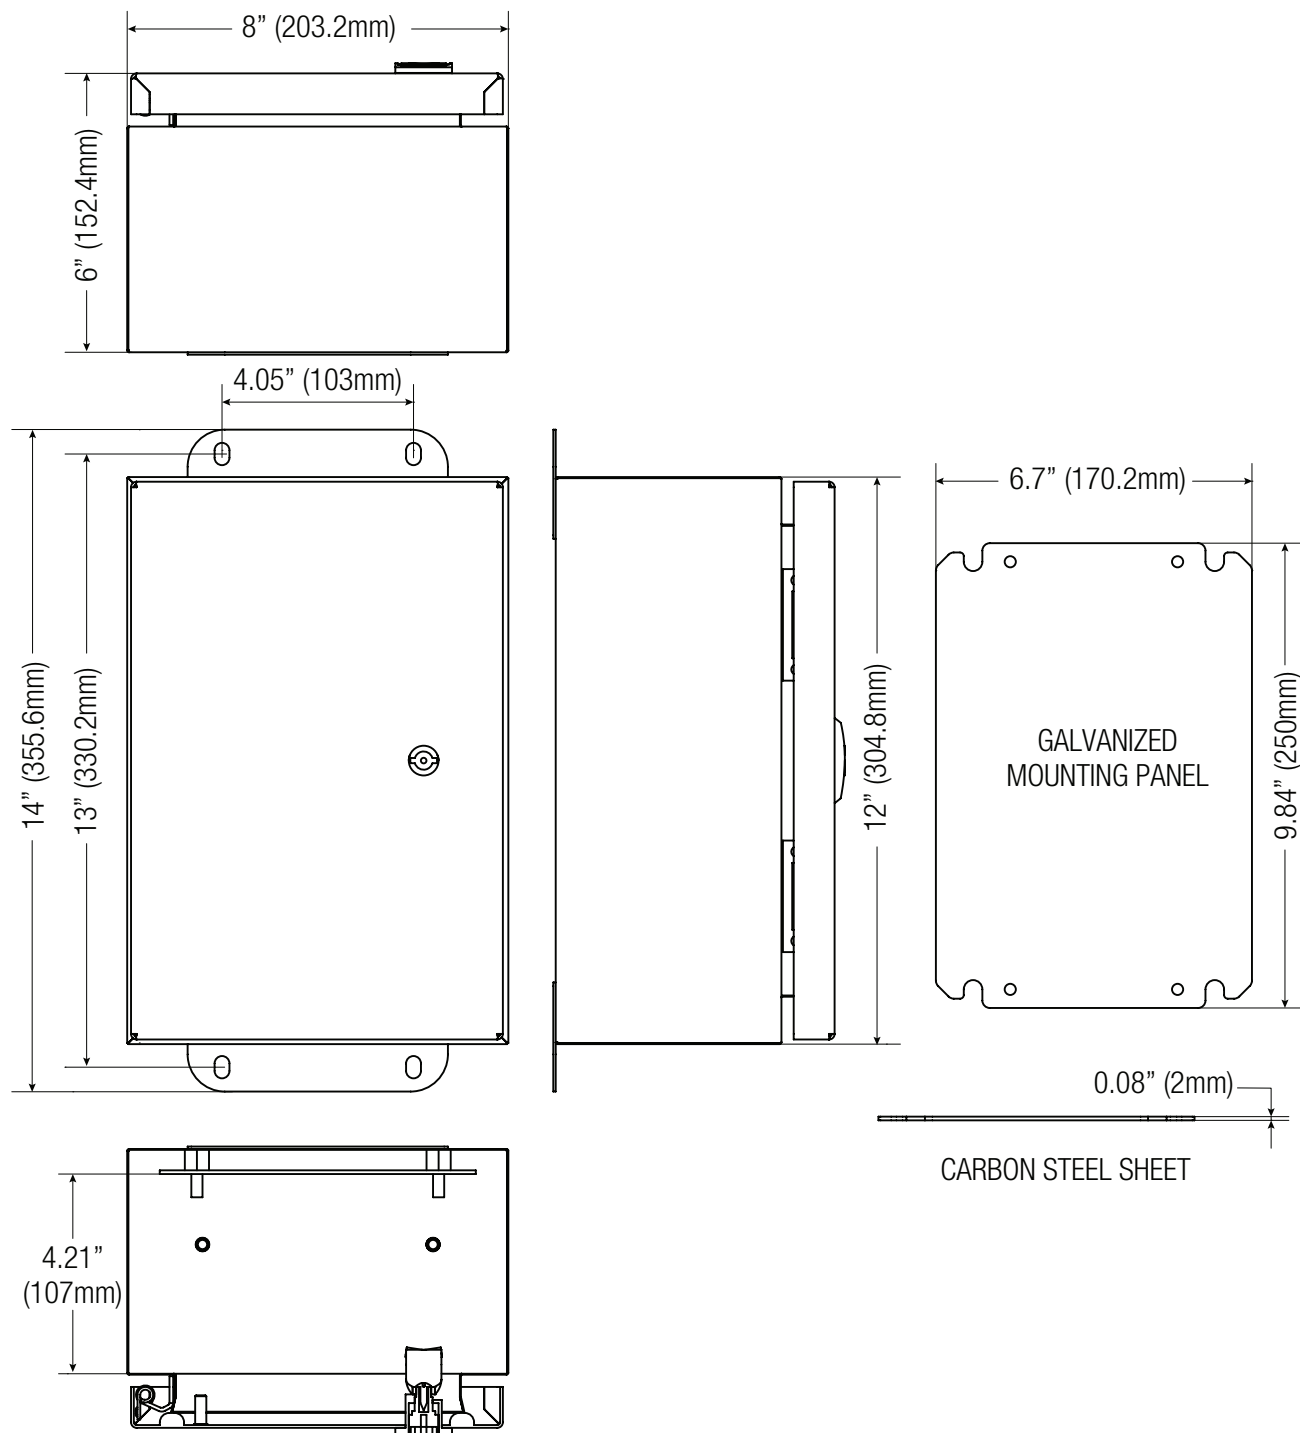
PMK1 pole mount kit is designed to simplify installation of outdoor units.  
It accommodates 2" - 8" (diameter) poles.

**Lifetime Warranty**

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

12" x 8" x 6" (304.8mm x 203.2mm x 152.4mm)

**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)