


#### Description

Altronix T2CVK33F10 kit consists of Trove2 enclosure, TCV2 CDVI/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers, and two (2) PTC protected five (5) output Power Distribution Modules with Fire Alarm Interface. This kit also accommodate various combinations of CDVI Atrium A22K/A22NB/ADH10 boards for up to ten (10) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

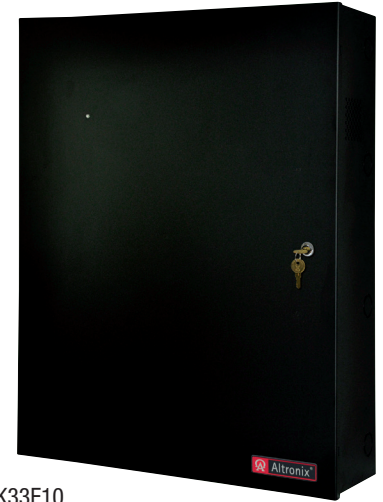

T2CVK33F10

#### Key Features

- 12 or 24VDC power supply/chargers.
- Accommodates up to five (5) CDVI Atrium A22K/A22NB/ADH10 boards.
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit).
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- 16 AWG galvanized steel backplane simplifies board layout and wire management.
- Supervision
  - AC Fail
  - Supervision (*cont'd*)
    - Low Battery and Battery Presence
    - Low power shutdown.
- Agency Listings:
  - UL: UL294 - Access Control System.
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems.
  - CE European Conformity.
- Enclosure accommodates up to four (4) 12VDC/12AH batteries.
- Lifetime Warranty\*/Made in the U.S.A.

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

#### Accessories (order separately)



LINQ2

#### LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

#### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

#### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

**Specifications**

**Two (2) Power Supply/Chargers (eFlow 6NB):**

**Input**

Voltage 120VAC, 60Hz, 3.5A max.

Input Fuse 5A/250V.

**Outputs**

Voltage 12VDC or 24VDC selectable.

Current 6A continuous max.

Auxiliary Power-limited @ 1A (unswitched).

Other Overvoltage protection. Filtered and regulated.

**Back-up Battery (not included)**

Type Sealed lead acid or gel type.

Fuse Rating 10A @ 32VDC.

Failover Upon AC loss, instantaneous.

**Fire Alarm Disconnect**

Supervised Latching or non-latching.

EOL 10K Resistor.

**Supervision**

AC Failure Form "C" contacts.

Battery Form "C" contacts.

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge.

**Indicators (LED)**

Input 120VAC is present.

DC Output Powered.

**Two (2) Power Distribution Modules with Fire Alarm Interface (MOM5):**

**Input**

Voltage 12VDC or 24VDC from power supply.

**Output**

Five (5) individual Class 2 Rated PTC protected power-limited outputs (auto-resettable).

Voltage 12VDC or 24VDC.

Current 2.5A continuous supply current. Current limit is 2A per output.

Other Short circuit and thermal overload protection. Filtered and regulated.

**Two (2) Power Distribution Modules with Fire Alarm Interface (MOM5): (cont'd):**

**Fire Alarm Interface**

Fire Alarm Panel or Access Control System trigger inputs N.O. or N.C. supervised trigger input and polarity reversal trigger input.

**Supervision**

Power Failure Form "C" contact rated 1A 28VDC/115VAC.

Trigger Form "C" contact rated 1A 28VDC/115VAC.

**Indicators (LED)**

Input Power is present.

Input Trigger On.

Outputs (Individual LEDs) Output fail.

**T2CVK33F10 Kit:**

**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE European Conformity.

**Physical and Environmental**

**Dimensions (H x W x D)**

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).

**Weight (approx.)**

Product 54.7 lb. (24.8 kg).

Shipping 59.7 lb. (27.1 kg).

**Temperature**

Operating 0°C to 49°C (32°F to 120°F).

Storage -20°C to 70°C (-4°F to 158°F).

**Relative Humidity**

85% +/-5%.

**BTU/Hr (approx.):**

12VDC: 74 BTU/Hr.

24VDC: 148 BTU/Hr.

12VDC and 24VDC: 111 BTU/Hr.

## T2CVK33F10

### Access & Power Integration Solution

**Access Controller Position Chart for the Following Models:**

| CDVI                  | Pem Mounting |
|-----------------------|--------------|
| A22K1NB, A22NB, ADH10 | Ⓐ            |

