


T2KHK312 (Kit)

Access & Power Integration Solution for Kantech



Altronix T2KHK312 kit consists of Trove2 enclosure, TKH2 Kantech/Altronix back-plane with one (1) 12VDC or 24VDC @ 6A power supply/charger, one (1) eight (8) output fused access power controller, one (1) four (4) output fused access power controller and one (1) 16VAC/18VAC transformer.

This kit also accommodate various combinations of Kantech boards for up to twelve (12) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

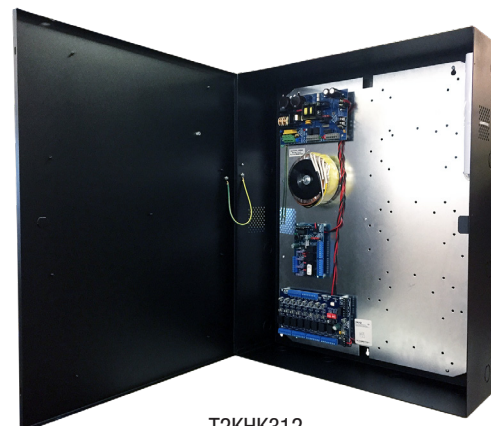T2KHK312

Key Features

- 24VDC power supply/charger
- Accommodates the following Kantech boards:
 - Up to two (2) KT1
 - Up to three (3) KT400
 - Up to four (4) KT-MOD-INP16 or KT-MOD-OUTP16
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
- Supervision (*cont'd*)
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

*Altronix Power Supply/Chargers and Sub-Assemblies only

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

Specifications

Power Supply/Charger (AL600ULXB):

Input

Voltage	115VAC, 60Hz, 3.5A max.
Fusing	5A / 250V.

Outputs

Voltage	12VDC or 24VDC selectable.
Current	6A @ 12VDC or 24VDC continuous max
Other	Filtered and regulated

Back-up Battery

Capacity	7AH / 12VDC (up to 4 within enclosure) 12AH / 12VDC (up to 4 within enclosure) 40 AH / 65 AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Access Power Controller (ACM4):

Input

Voltage	24VDC from AL600ULXB
Input Fuse	10A/32V

Outputs

Voltage	24VDC
Four (4) independently controlled 2.5A outputs:	
a) Four (4) Fail-Safe and/or Fail-Secure power outputs	
b) Four (4) dry form "C" 5A rated relay outputs.	
c) Any combination of the above	
Four (4) auxiliary power outputs (unswitched)	
Output Fuses	3A/32VDC

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Access Power Controller (ACM8):

Input

Voltage	24VDC from AL600ULXB
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output Fuses	3.5A/250V
--------------	-----------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Transformer (T1618300K):

Input

Voltage	115VAC, 50/60Hz, 2.7A
---------	-----------------------

Output

Voltage	16VAC/300VA (18.7A) or 18VAC/300VA (16.7A)
---------	--------------------------------------------

T2KHK312 Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).
Shipping:	32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Weight (approx.)

Product	61.7 lb. (28 kg)
Shipping	66.7 lb. (30.25 kg)

Temperature


Operating	0°C to 50°C (32°F to 122°F)
Storage	-20°C to 70°C (-4°F to 158°F)

Relative Humidity	85% +/-5%
-------------------	-----------

BTU/Hr (approx.):	232 BTU/Hr
-------------------	------------

Access Controller Position Chart for the Following Models:

Kantech	Pem Mounting
KT-400	(A)
KT-1	(B)
KT-MOD-IN16, KT-MOD-OUT16	(C)

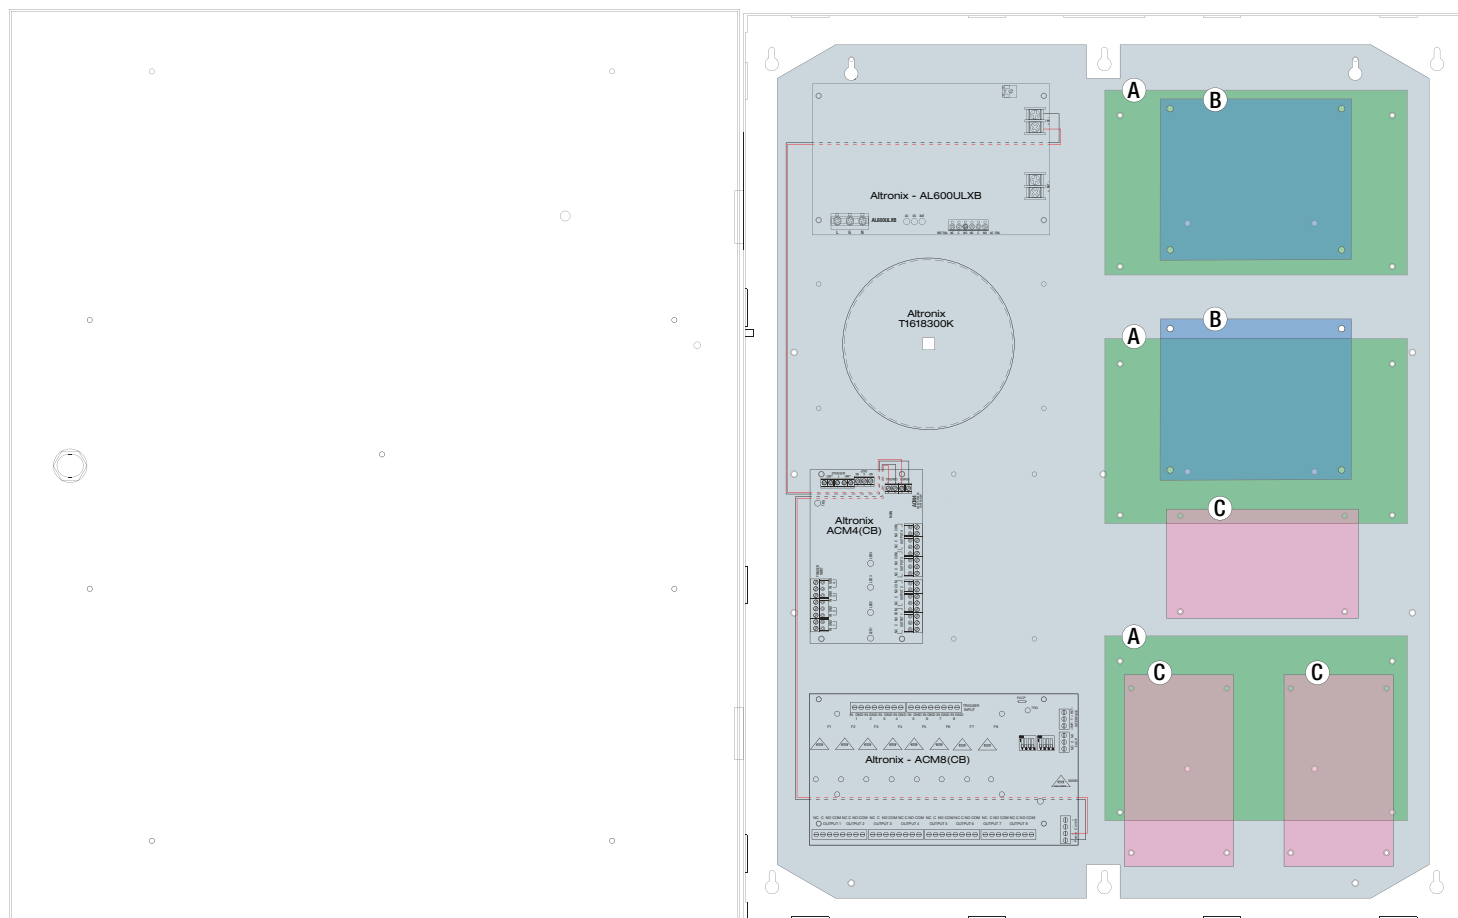

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

