


T2SK7F8D

Access & Power Integration Solution

Description

Altronix T2SK7F8D kit consists of Trove2 enclosure, TSH2 Software House/ Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) PTC access power controller, one (1) voltage regulator and one (1) dual input PTC power distribution module.

This kit also accommodates various combinations of Software House boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

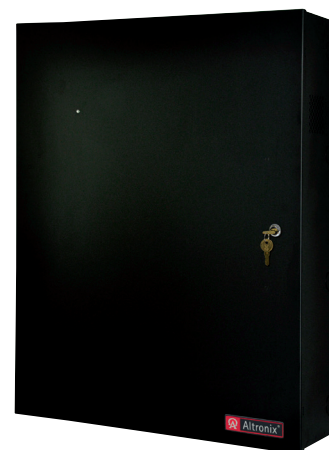

T2SK7F8D

Key Features

- 24VDC power supply/charger.
- Accommodates the following Software House controllers:
iStar Ultra GCM and iStar Ultra ACM boards or
iSTAR Pro GCM and iSTAR ACM SE/PRO ACM boards,
as well as I8, R8, and I8-CSI boards.
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit).
 - Sixteen (16) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- 16 AWG galvanized steel backplane simplifies board layout and wire management.
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown.
- Agency Listings:
 - UL: UL294 - Access Control System.
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems.
 - CE European Conformity.
- Enclosure accommodates up to four (4) 12VDC/12AH batteries.
- Lifetime Warranty* / Made in the U.S.A.

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

T2SK7F8D**Access & Power Integration Solution****Specifications****Power Supply (eFlow104NB):****Input**

Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.5A/250V.

Outputs

Voltage	24VDC.
Current	10A continuous.
Auxiliary	Class 2 power-limited @ 1A (unswitched).
Other	Overvoltage protection. Filtered and regulated.

Battery Backup (not included)

Type	Sealed lead acid or gel type.
Fuse Rating	10A/32VDC.
Failover	Upon AC loss, instantaneous.

Fire Alarm Disconnect

Supervised	Latching or non-latching.
EOL	10K Resistor.

Supervision

AC Failure	Form "C" contacts.
Battery	Form "C" contacts.

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units. Prevents deep battery discharge.

Indicators (LED)

Input	120VAC is present.
DC Output	Powered.

Dual Input Power Distribution Module (PDS8CB):**Input**

Voltage	12VDC from VR6 and 24VDC from eFlow6NB.
Input PTC Rating	9A.

Outputs

Class 2 power-limited auto-resettable outputs.
Voltage 12VDC and/or 24VDC.
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2.
Individual outputs may be set to OFF position for servicing.

Outputs Ratings

PTCs	2.5A.
------	-------

Indicators (LED)

DC Output	Eight (8) individual output LEDs.
Green:	12VDC
Red:	24VDC.

Voltage Regulator (VR6):**Input**

Voltage	24VDC from eFlow104NB.
---------	------------------------

Output

Voltage	12VDC.
Current	6A continuous.
Other	Surge suppression.

Indicators (LED)

Input	24VDC is present.
Output	Powered.

Access Power Controller (ACM8CB):**Input**

Voltage	24VDC from eFlow6NB.
Input Fuse	10A/250V.

Outputs

Class 2 power-limited auto-resettable outputs.
Voltage 24VDC.
Eight (8) 24VDC independently controlled PTC outputs:
a) Fail-Safe and/or Fail-Secure power outputs.
Form "C" Relays rated 28VAC or VDC @ 2.5A.
b) Any combination of the above.

Output PTCs	2.5A.
-------------	-------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized).
Green LED	FACP disconnect is triggered.

T2SK7F8D Kit:**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity.
----	----------------------

Physical and Environmental**Dimensions (H x W x D)**

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).

Weight (approx.)

Product	54.3 lb. (24.6 kg).
Shipping	59.3 lb. (26.9 kg).

Temperature

Operating	0°C to 50°C (32°F to 122°F).
Storage	-20°C to 70°C (-4°F to 158°F).

Relative Humidity	85% +/-5%.
-------------------	------------

BTU/Hr (approx.):	128 BTU/Hr.
-------------------	-------------

T2SK7F8D

Access & Power Integration Solution

Access Controller Position Chart for the Following Models:

Software House	Pem Mounting
iStar Pro GCM	(A)
iStar Ultra GCM	(B)
iStar Pro ACM, iSTAR ACM SE	(C)
iStar Ultra ACM	(D)
I8, R8 or I8-CSI	(E)

