



TRIVE™

Access & Power Integration

THWD2

- Honeywell ProWatch/WinPak door backplane for Trove2 and Trove3

Installation Guide

Overview:

THWD2 accommodates a variety of Honeywell ProWatch/WinPak boards for access systems of up to twelve (12) doors.

Specifications:

- 16 Gauge backplane.
Dimensions (H x W x D): 23.75" x 18.125" x 0.3125" (603.3mm x 460.3mm x 7.9mm).

Backplane Accommodates a Combination of the Following:

- Up to six (6) PRO32IC, PRO32R2, PRO32IN, PRO32OUT, PW6K1IC, PW6K1R2, PW6K1IN, PW6K1OUT modules.
- One (1) PRO22MX8 module.

Hardware:



Nylon Spacer |



5/16" Pan Head Screw |



Lock Nut

THWD2: Configuration of Honeywell ProWatch/WinPak Boards:

Honeywell ProWatch/WinPak Access Controllers:

1. Fasten spacers (provided) into pem configuration (A) or (B) of backplane (*Fig. 1, pg. 2*).
2. Mount boards to spacers utilizing 5/16" pan head screws (provided) (*Fig. 1a, pg. 2*).
3. Mount backplane to enclosure with hardware.

Honeywell ProWatch/WinPak Access Controller Position Chart for the Following Models:

Honeywell Board	Pem Mounting
PRO32IC, PRO32R2, PRO32IN, PRO32OUT, PW6K1IC, PW6K1R2, PW6K1IN, PW6K1OUT	(A)
PRO22MX8	(B)



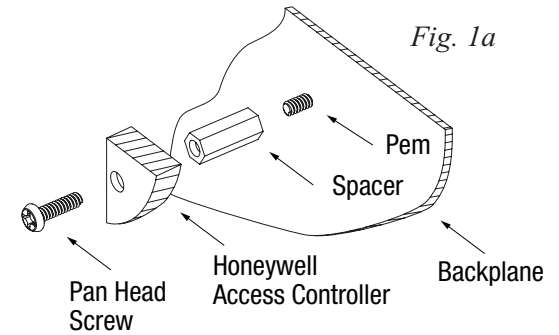


Fig. 1

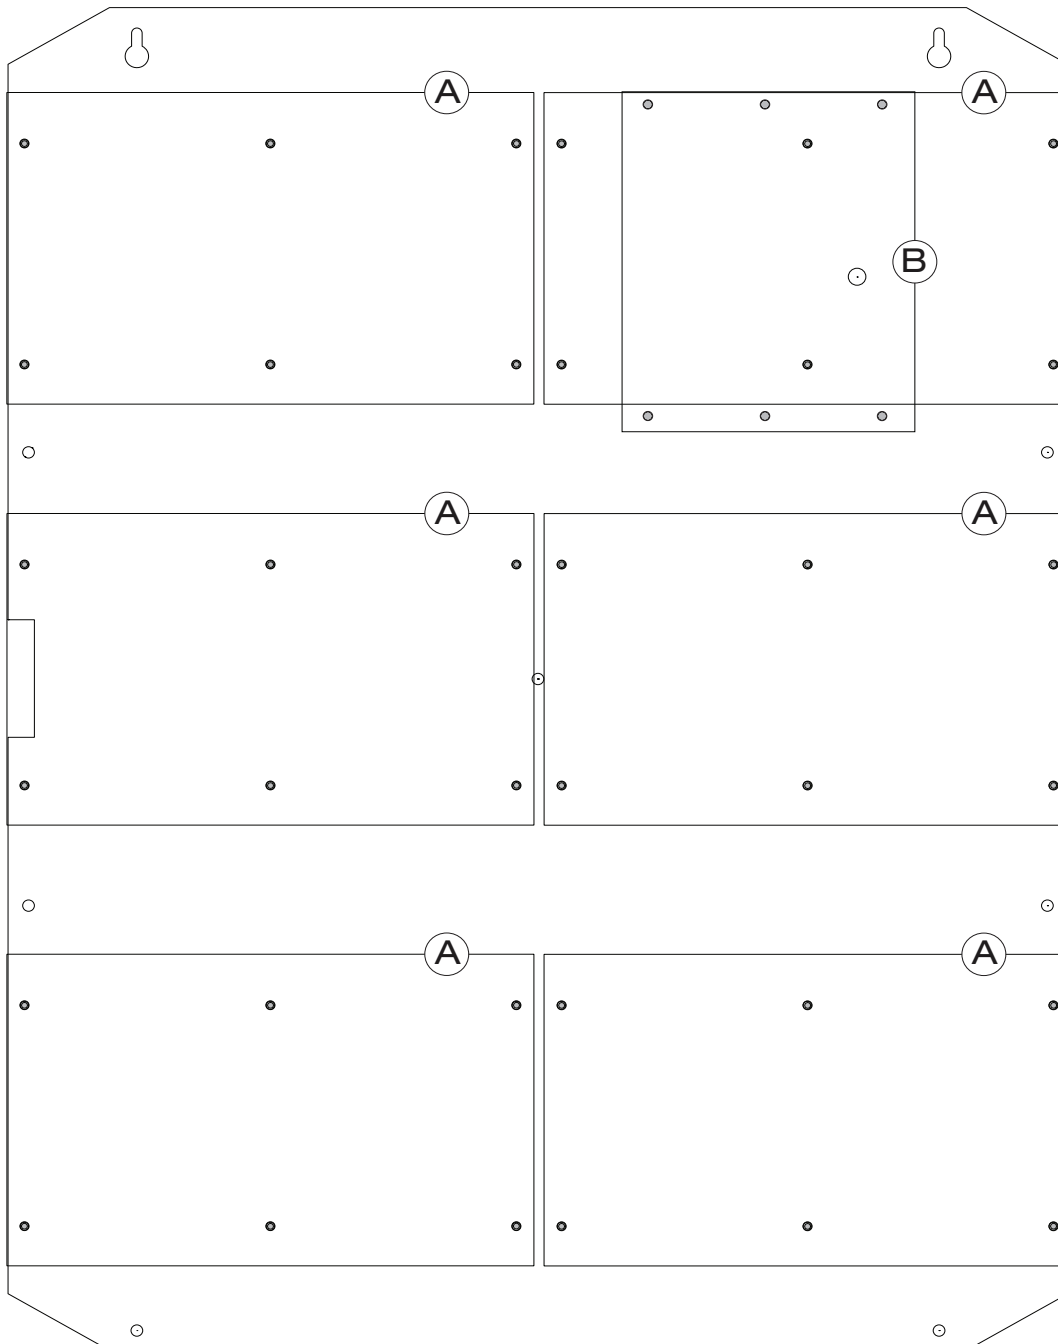

Notes:

THWD2 Backplane Dimensions (H x W x D):
 23.75" x 18.125" x 0.3125" (603.3mm x 460.3mm x 7.9mm)

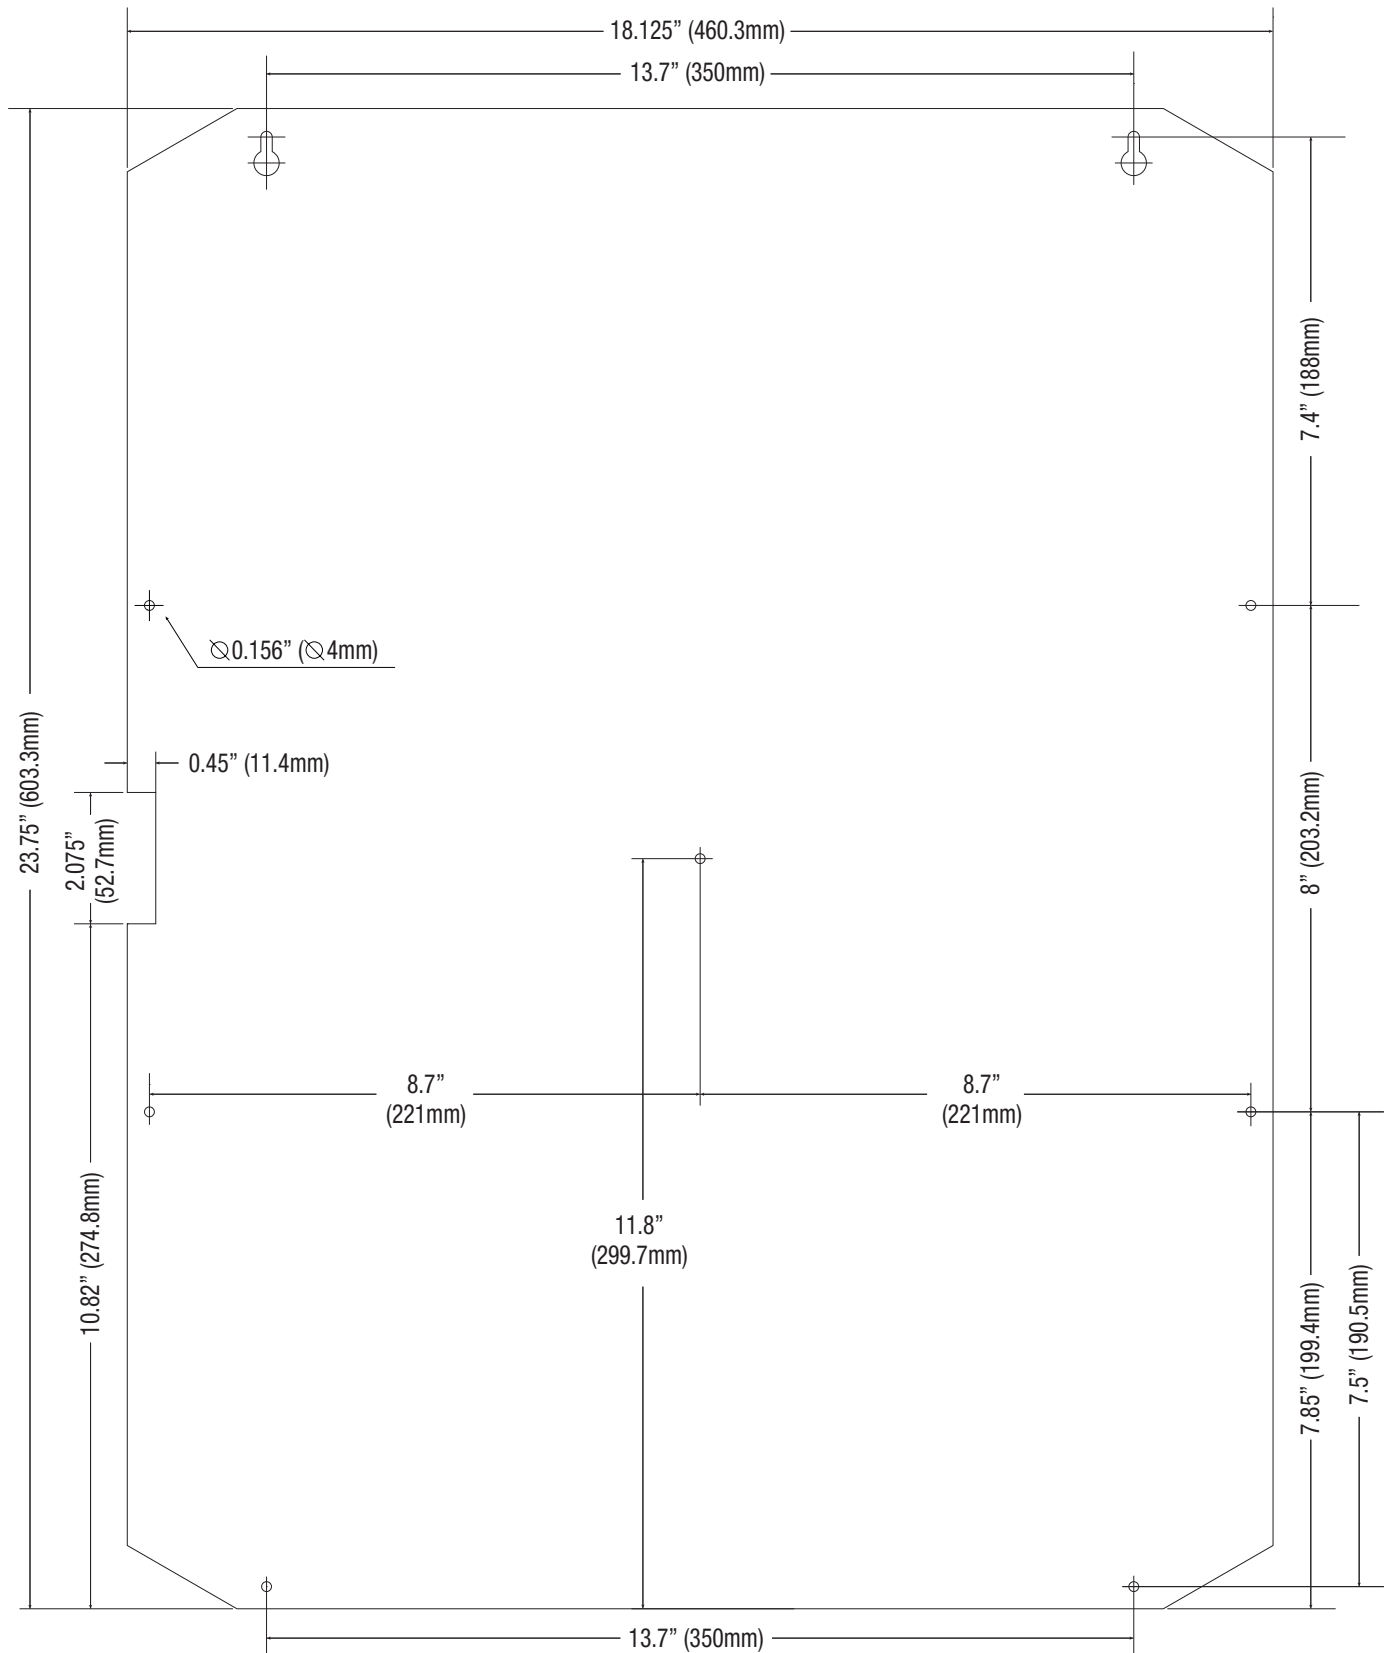

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 web site: www.altronix.com | e-mail: info@altronix.com | Made in U.S.A.
 IITHWD2

A16S



THWD2 - Honeywell ProWatch/WinPak Door Backplane