

Z7R8182X3-P 4K Day & Night Auto Focus IR Bullet IP Camera



www.meritlilin.com


- ▶ Ultra HD 8M megapixel CMOS image sensor
- ▶ 8MP H.265/HEVC and H.264/AVC high-performance video compression
- ▶ Simultaneous streaming of H.265 and H.264 encoded streams
- ▶ Auto focus with zoom / focus motorized lens
- ▶ P-IRIS supported
- ▶ 3D noise reduction (MCTF)
- ▶ HDR function up to 120dB
- ▶ Digital PTZ supported
- ▶ IVS / AI supported (need purchase license)
- ▶ Motion / Tamper / Audio / Alarm / Network lost detection / Global Counter / Virtual Input / Metadata
- ▶ SMART event
- ▶ High efficiency IR LED, radiant distance up to 40m
- ▶ Day & Night (IR cut removable)
- ▶ 2-way audio supported
- ▶ Digital I/O : 1 in, 1 out
- ▶ Cable managed housing and bracket
- ▶ ONVIF Profile S, Profile T and Profile G supported
- ▶ IP68 rain and dust resistant
- ▶ Vandal resistant approve IK10

Dimensions

102.5(W) × 102.5(H) × 258(D) mm

Diagram of mounting holes:(unit in mm)

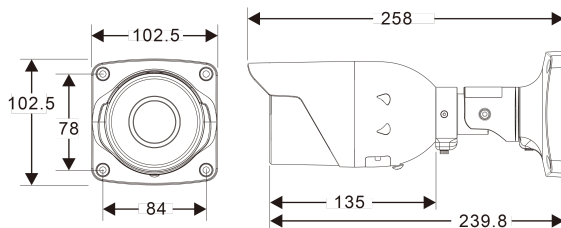

Wind and Rain Standards

Meet international IP68 standards for dust and moisture resistant allowing you to install cameras in environments subject to wind and rain



Impact Resistant

IK10-certified housing designed to protect the camera from destructive behavior



Day and Night Operations via Removal of the IR-cut filter

Z7R8182X3-P camera was designed using a mechanical IR cut filter for increased IR sensitivity resulting in improved night time images. The removable IR-cut filter allows day and night operations even in the low lux condition providing outstanding vision



Sense Up+

Deliver outstanding video outputs in poor light conditions without experiencing motion blur. You can see video clearly even during nighttime without sufficient lighting support



3D Noise Reduction

Remove noise from a signal. Suppressing noise in an image in low light conditions and able to retain quality videos at the same time



High Dynamic Range

An High Dynamic Range (HDR) image is made by taking 3 frames of the same scene and each at different shutter speeds to display details of both the darkest and brightest areas. HDR can extend image visibility under high contrast lighting scenes and improve image quality



Privacy Masking

Privacy Masking is a feature used to protect personal privacy by concealing private areas in the camera's field of view. Doorways and house windows for example are not subject to surveillance



Auto Focus feature

Use the camera software to trigger the auto focus function at any time during installation or after. Auto Focus feature to automatically focus the camera from a distant location, which eases the process on installation and helps you effectively position the camera at the right focus angle in a matter of seconds



Video Security App

Available on Android and iOS – LILINViewer app provides security alarm push notification, real-time live viewing, and remote video playback



SD Cards in Sync with NAV Software

Z7R8182X3-P camera with built-in Micro SD/SDHC/SDXC card slots can provide redundant video viewing and recording. You can synchronize an SD card with LILIN VMS (Video Management Software) – Navigator (NAV)



4K Day & Night Auto Focus IR Bullet IP Camera	
Video Performance	
Model	Z7R8182X3-P
Min. Illumination	Color : 0.04 Lux at F1.6 ; B/W : 0.008 Lux at F1.6 ; 0 Lux with IR LED ON
Lens / Night Vision (Infrared LED)	
Focal Length	2.8~12mm (zoom / focus motorized)
Iris	F 1.6(W) - F 3.3(T)
Iris Control	P-iris
Angle of View	108.0° (W) - 31.5° (T) (H) 56.3° (W) - 18.0° (T) (V) 130.8° (W) - 36.7° (T) (D)
Peak Wavelength	850nm, White LED
Beam Spread	60° , 90°
Radiant Distance	40M
Sensor	
Pick Up Element	1/2.8" CMOS image sensor
Effective Pixels	3864 (H) × 2176 (V) = 8,408,064 (Pixels)
Light Sensor	Yes
Certifications	
CE	Yes, EMI Class A
FCC	Yes, EMI Class A
IP Rating	IP68
Vandal Resistant Rating	IK10
PC Requirements	
CPU	Intel® Core™ i7 or higher grade
OS	Windows 7 or above
RAM	8GB or above, Dedicated Graphics Card
Web Browser	Microsoft® Internet Explorer® 9 or above
Input / Output	
Audio Input / Output	Mono, 1.98 Vp-p , 2.2KΩ , Terminal Block
Audio	Two-way Audio, G.711 u-law / PCM / AAC, External Microphone Required
Alarm Input / Output	Digital 1 input (TTL, +3 – 5VDC) / 1 Output (MOS Relay contact N.O., Load.max. 40VDC,450mW/300mA,450mW), Terminal block
Live Video Output	CVBS 1.0Vp-p, 75 ohm, Connector
Video Streaming	
Video Compression	H.265/HEVC main profile, H.264 main and high profile , Motion JPEG
Video Streaming	RTP/HTTP, RTP/TCP, RTP/UDP, Multicast streams in H.265 and H.264 and Motion JPEG, configurable frame rate and bandwidth
Number of Streams	4
Video Bitrate	128Kbps – 12Mbps; Frame rate and bit rate controllable on-the-fly; VBR / CBR / GOP supported, Fixed bitrate
Network Security	
Encryption	Base64 HTTP encryption, HTTPS encryption
Authentication	Digest HTTP authentication, RTSP authentication, DDNS via HTTPS
Address Filter	IP address filter, MAC address filter
Access	Multiple user access levels with password protection
User accounts	10 user accounts available
Multi IP Address	Yes
Video Resolutions (H × V)	
Resolution	4K(3840 × 2160), 6M(3072 × 2048), 5MP(2592 × 1944), 4MP(2304 × 1728), 3.1MP(2048 × 1536), 3MP(2304 × 1296), 2MP(1920 × 1080), 1.3MP(1280 × 960), 1MP(1280 × 720), D1(720 × 480, 720 × 576), VGA(640 × 480), CIF(352 × 240)
Maximum Frame Rate	Normal mode: 60Hz: 30 FPS @ 3840 × 2160 50Hz: 25 FPS @ 3840 × 2160 HDR mode: 60Hz: 30 FPS @ 3840 × 2160 50Hz: 25 FPS @ 3840 × 2160

Video Functions	
Scanning System	Progressive Scan
Infrared Cut Filter	Auto / Day (Color) / Night (Mono) / Schedule
White Balance	Auto / Manual one push
Electrical Shutter	1/30(1/25)s – 1/20000s
Sense Up	Off / x2 / x4 / x8 / x16
Sense Up+	Yes
Auto Gain Control	60 dB Variable Gain
S/N Ratio	More than 50dB (AGC off)
3D Noise Reduction	Off / 1 – 32 Selectable
High Dynamic Range	Up to 120dB (by HDR mode, 2 shutter line interleave)
Privacy Masking	Off / On (4 zones)
Image Effects	Brightness, Contrast, Hue, Saturation, Sharpness, Mirror, Flip, Rotation, Overexposure Reduction
Auto Focus	One Push
Smart IR	Yes
EV (Exposure Value)	Adjustable
Integration	
Mobile Application	Integrated to LILIN mobile app (LILIN Viewer) iPhone, iPad, Android support
Video Management	ONVIF Profile S / ONVIF Profile T / ONVIF Profile G / IVS events, LILIN Navigator Enterprise 2.0 support, Third party VMS through LILIN HTTP API
SD Card Recording	Support Micro SD/SDHC/SDXC card for circular recording (card is not included)
SD Card Compatible List	Micron - 32GB,64GB,128GB,256GB,512GB, 1TB (SDXC, U1, C10) Transcend - 4GB SD,8GB SDHC,32GB SDHC C10,128GB SDXC C10 SanDisk - 8GB SDHC, 32GB, 64GB, 128GB SDHC C10 Kingston - 64GB SDXC C10
Maintenance	Firmware update via HTTP and IP Scan; Firmware available at website
IVS Basic 1.0	Motion / Tamper
Event Triggers	Motion / Tamper / Audio / Alarm / Network lost detection / Global Counter / Virtual Input / Metadata
Event actions	FTP / SMTP / HTTP post / SD card / SAMBA / Alarm Output / Push Service / Global Counter / Virtual Input
Languages	English, Traditional Chinese, Simplified Chinese, Russian, Italian, Hungarian, Korean, French, Turkish, Arabic, Spanish, Japanese
Network	
Ethernet	10/100/1000 Mbps Base-T, RJ-45
ePTZ & Digital Zoom	Yes
OSD	Position configurable text overlay for date, time, camera ID, event status and watermark with customizable user demand data
CPU, Memory	Embedded Quad-core ARM Cortex-A53 1.0GHz CPU & 2GB LPDDR4X, 8GB e.MMC memory
OS	Embedded Linux 4.14
Network Protocols	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, QoS, beat, NTP, DDNS, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMP, IGMP, ONVIF Profile S, ONVIF Profile T, ONVIF Profile G
Max number of online users	10 simultaneous users
Video Display	LILIN Universal ActiveX & HTML5
Log	Event & operation log & IVS event log
Schedule	Support holiday list
Network Storage	NAS (Support SAMBA/CIFS)
Power and Environment	
Starting Temperature	-10°C – +50°C (14°F – 122°F)
Operating Temperature	-40°C – +50°C (-40°F – 122°F)
Storage Temperature	-25°C – +60°C (-13°F – 140°F)
Humidity	0% – 90% RH
Power Supply	DC12V ±10% (Terminal connector) / PoE+ (IEEE 802.3at compliant)
Power Consumption	DC12V,13.2W / PoE+, 14.0W
Mechanical	
Dimension	102.5(W) × 102.5(H) × 258(D) mm
Weight	1020g
Casing Material	Aluminum alloy
Window	Ø75 Heat Resistant Glass & Rain repellent glass