

HES[®] 1006 Electric Strike

ASSA ABLOY

The global leader in
door opening solutions



The strongest, most
versatile electric strike
available.

Unsurpassed Flexibility

- Accommodates every cylindrical and mortise locksets with or without a 1" deadbolt
- Available as a separate strike body and interchangeable faceplate or a Complete Pac
- Non-handed, dual voltage and available in fail safe or fail secure (standard)

Tested for Durability

- UL 10C, 3 hour fire-rated
- ANSI A250.13-2003 windstorm listed
- UL 1034 burglary-resistant listed and suitable for outdoor use

Robust Design

- ANSI/BHMA A156.31, Grade 1
- Endurance 1 million cycles
- Tamper resistant, stainless steel construction



Features

Standard Features

- Stainless steel construction
- Tamper-resistant
- Static strength 2,500 lbs
- Dynamic strength 350 ft-lbs (fail secure)
- Endurance 1 million cycles
- Fail secure (Standard)
- Non-handed
- Accommodates up to 1" [25.4mm] deadbolt
- Plug-in connector
- Full keeper shims for horizontal adjustment
- Trim enhancer
- Strike body depth 11/16" [17.5mm]
- SecuriCare five-year, no-fault, no questions asked warranty

Optional Features

- **LBM** Latchbolt monitor
- **LBSM** Latchbolt strike monitor
- Interchangeable faceplates

(Monitor switches may not work with all faceplate options)



Grade 1



SecuriCare
Warranty



Mortise Locks
with Deadbolt



Mortise Locks
without
Deadbolt



Cylindrical
Locksets



Rim Exit
Devices



Specialty
Locksets



Dual Voltage
12/24



Fire Rated



Windstorm
Resistant



Outdoor
Rated



Burglary
Rated

Heavy Duty | Versatile | All Locksets

Dimensions

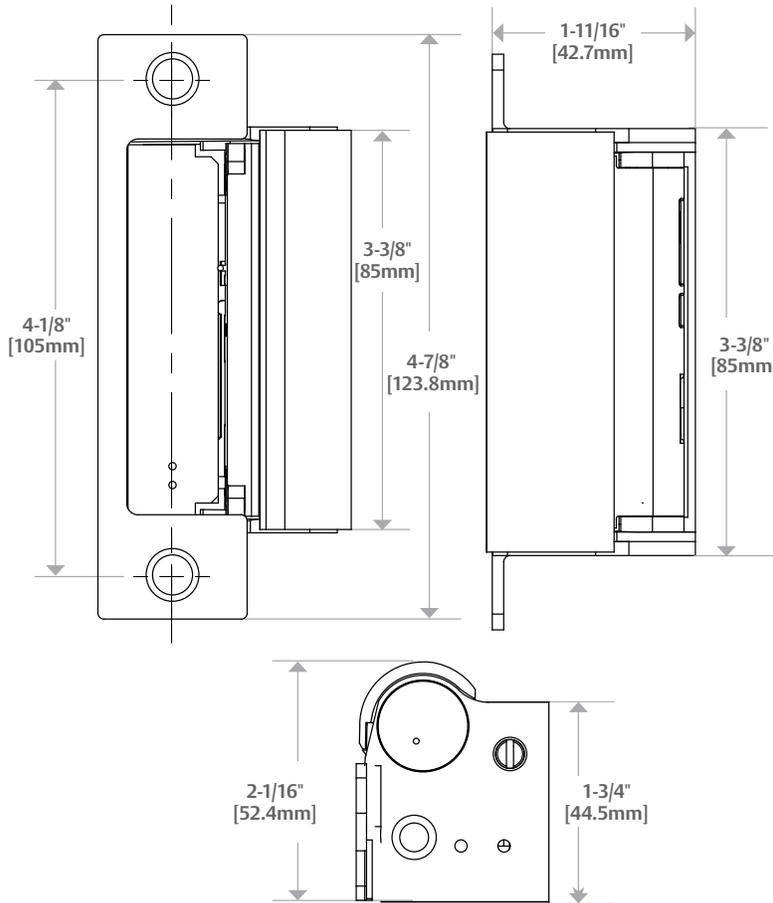


Diagram shown with cylindrical faceplate

Specifications

Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed
- RoHS compliant
- UL 10C fire-rated, 3 hour single door (fail secure only)
- UL 10C fire-rated, 1-1/2 hour double door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- ANSI/SDI A250.13 windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- ANSI-ASTM E330
- Sustainability documentation

Accessories

- **1000-102** Rain guard
- **1006-103** Full keeper shims
- **1000-104** Lip extension trim adapter
- **1006-105** Trim enhancer BLK (goof plate)
- **1006-109** Trim adapter
- **1000-110** Replacement strike plate
- **1000-130** KD filler plate
- **150** Strike latch guard
- **HESCUT-MTK** Metal template kit
- **2005M3** SMART Pac® III

Frame Application

- Metal
- Wood

Electrical (DC Continuous Duty)

- Dual Voltage 12/24 VDC
- 450 mA at 12 VDC / 250 mA at 24 VDC

How to Order

Series	Model	Fail Safe / Secure	Finish*	Option (s)
1006	—	— F	— 630	— LBM
1006 Universal Electric Strike Faceplates ordered separately	CS* Complete Electric Strike; Includes the SMART Pac II and J, KD, KM, HM, ND faceplates and brackets	F Fail Safe / Secure	605 Bright Brass	LBM Latchbolt Monitor
	CLB* Complete Electric Strike; Includes the SMART Pac III and J, K, KD, KM, faceplates and brackets	(blank) Fail Secure (standard)	606 Satin Brass	LBSM Latchbolt Strike Monitor
	CDB* Complete Electric Strike for Deadbolt Locks; Includes the ND and HM faceplates		612 Satin Bronze	
	CAS* Complete Electric Strike for Deadbolt Locks; Includes the N, ND and NM faceplates		613 Bronze Toned	
		629 Bright Stainless Steel		
			630 Satin Stainless Steel	
			BLK Black	

*Complete Pacs are only available in the 630 finish