

HES[®] 7501 Electric Strike Complete Pac

ASSA ABLOY

The global leader in
door opening solutions



The Grade 1, fire-rated, preload solution.

Preload Capable

- Preload release function allows smooth operation under loads on the door that often bind other electric strikes
- Accommodates up to 15 pounds of preload (fail secure only)
- Ideal for applications with preload caused by air-conditioning pressure, changes in the weather, warped doors or doors with weather stripping

Robust and Reliable

- ANSI/BHMA A156.31, Grade 1
- Static strength 1,500 lbs, Dynamic strength 70 ft-lbs
- Endurance 1 million cycles

Versatile Design

- Works with both cylindrical latchbolts up to 3/4" throw
- Field selectable fail secure/fail safe
- Non-handed and includes plug in connector



Grade 1



SecuriCare
Warranty



Cylindrical
Locksets



Field Selectable
(Fail secure
/ Fail safe)



Dual Voltage
12/24



Fire Rated




Preload



Burglary
Rated

Preload Capable | Horizontal Adjustment | Latchbolts & Rim Exits

Dimensions

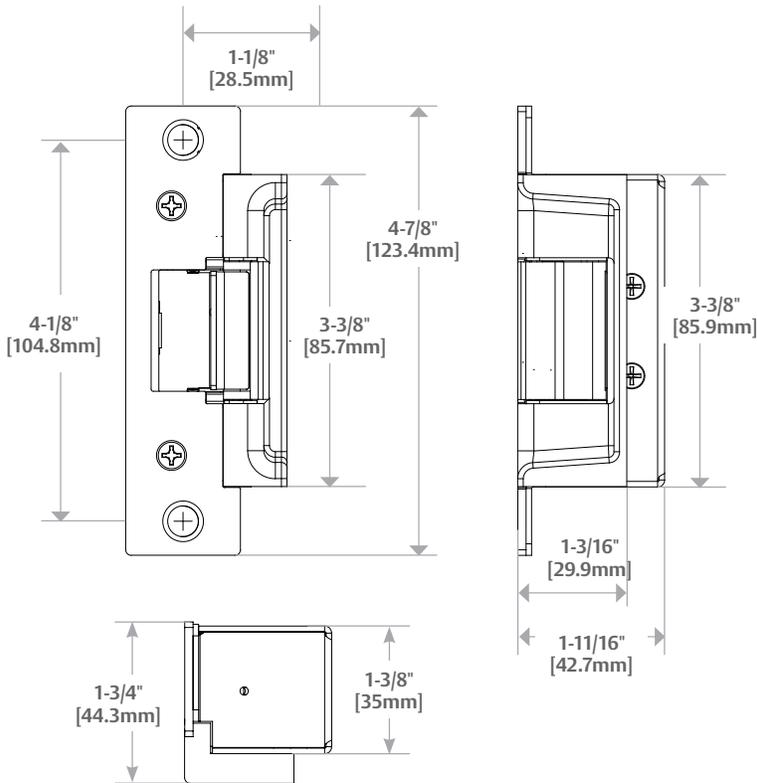

Specifications

Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed
- UL 10C fire rated, 3 hour (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant

Frame Application

- Metal
- Wood

Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC/VAC
- 240 mA at 12 VDC/120 mA at 24 VDC
- PoE friendly

Features

Standard Features

- Stainless steel construction
- Tamper-resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs

- Endurance 1 million cycles
- Field selectable fail secure /fail safe
- Accommodates preload (up to 15lbs: fail secure only)
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16"
- Plug-in connector
- Trim enhancer
- SecuriCare five-year, no-fault, no questions asked warranty

Optional Features

- **LBM** Latchbolt monitor

Accessories

- **2001M** Plug-in bridge rectifier
- **2004M** ElectroLynx® adapter
- **2005M3** SMART Pac® III
- **2006M** Plug-in buzzer
- **150** Strike latch guard
- **HESCUT-MTK** Metal Template Kit



Operation: After releasing the latchbolt, the keeper returns to the locked position.



4-7/8" x 1-1/4" x 1-11/16"

7501

For use with: Cylindrical locksets up to a 3/4" throw

ANSI/BHMA Numbers: E09321, E09322, E09323



How to Order

Series	Finish*	Option (s)
7501	- 630	- LBM
7501 Universal Electric Strike; Includes faceplate for cylindrical locksets	605 Bright Brass 606 Satin Brass 612 Satin Bronze 613 Bronze Toned 629 Bright Stainless Steel 630 Satin Stainless Steel	LBM Latchbolt Monitor

ELECTRONIC SECURITY HARDWARE

HES | Securitron

800.626.7590 | assaabloyesh.com | customerservice.esh@assaabloy.com

Copyright © 2018, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. ESH-HES-24-0818