

HES® K100 Aperio® Wireless Cabinet Lock

ASSA ABLOY

Installation & Operating Instructions

Experience a safer
and more open world

Product Contents


- A** Reader
- B** Lock Body
- C** Mechanical Key Override
- D** Installation Template
- E** Double Door Bracket
- F** Strike Plate
- G** Threadlock Pillow pack
- H** 2X AA Lithium Batteries*

*AA Lithium Batteries required. Use of other types of batteries, such as Alkaline, will significantly decrease battery life.


I Hardware:

- a. 2-56 X 7/16" 2x
- b. 8-32 X 5/16"
- c. 6-32 X 5/16" 3x
- d. 6 X 1/2" 6x
- e. 8-32" X 2-3/4" 2x
- f. 8-32" X 1-3/4" 2x
- g. 8-32" X 2-1/2" 2x
- h. 8-32" X 3" Rod
- i. 8-23 Nut

Diagram 1: Product Components

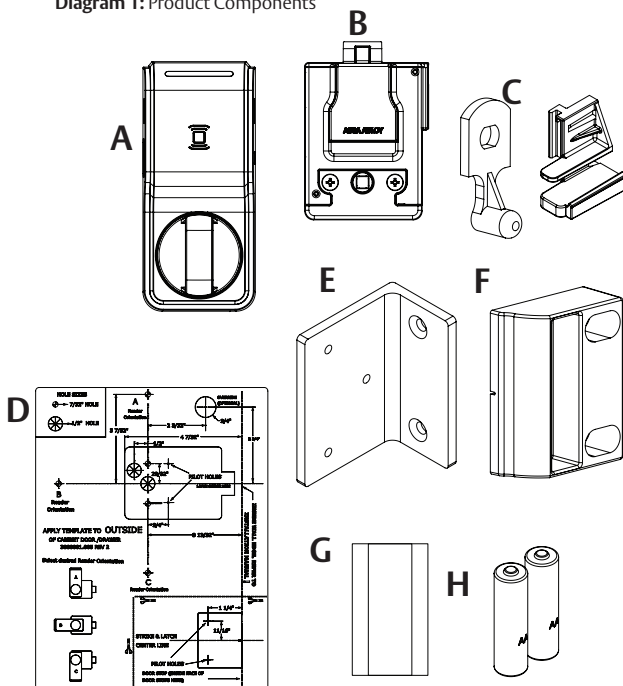

I: Hardware

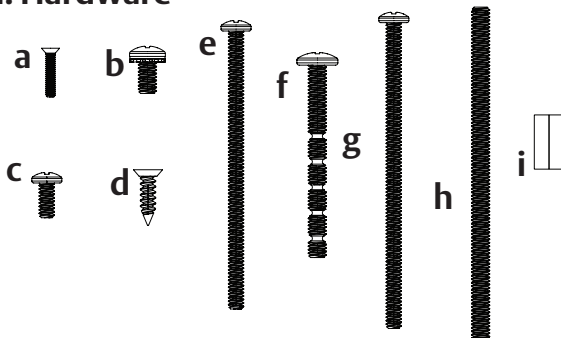


Recommended Tools

- Flathead Drivers – 3/32", 3/16"
- Drill & Drill Bits – 1/16", 3/16", 1/2"
- Phillips Drivers – PO, P2
- Pencil
- Wire Stripper
- Level
- Square
- Ruler
- Punch
- Scissors


Lock Orientation Options

Diagram 2: Orientation Options


Orientation A

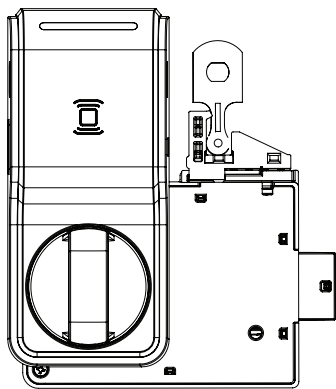

Orientation C

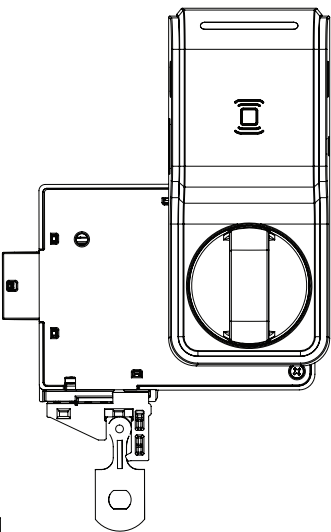

Orientation B

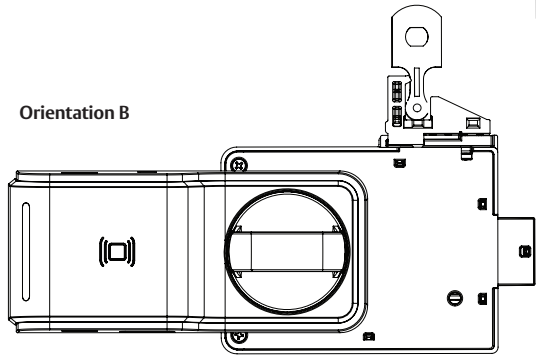

Product Specifications

- **Wireless Frequency**
2.4GHz, IEEE 802.15.4, using AES 128-bit encryption
- **Lock Battery Type** AA Lithium, 1.5 Volts (V)
- **Battery Life** 50,000 cycles*
*All battery life claims are approximate and based on a set configuration profile. Battery performance is based on pre-defined system settings such as battery chemistry and battery model used, credential presentation settings (LED/buzzer), UHF polling period, UHF status intervals, and operations per day. Actual battery performance will vary and depends on the factors above.
- **Holding Force** 400 lbs
- **Operating Temperature**
32° to 122° F (0° to 50° C)
- **HID® multiCLASS SE® technology Credentials Supported:**
 - **High Frequency (13.56 MHz):**
 - » HID iCLASS®
 - » HID iCLASS SE® (SIO-enabled)
 - » HID iCLASS® Seos™
 - » HID MIFARE® SE
 - » HID DESfire® EV1 SE
 - » MIFARE CLASSIC
 - » DESfire® EV1
 - **Low Frequency (125 kHz):**
 - » HID Prox®, AWID, EM4102, ioProx
 - **NFC/BLE***
 - » Mobile – enabled credentials

*Supported on BLE-enabled models


Hardware Specifications

Shaft Length	
Door Thickness	Shaft Used
1/16" – 1/2"	L1
> 1/2" – 1-1/2"	L2
>1-1/2" – 2-1/4"	L3

Mounting Screw Length for Various Door Thickness				
Door Thickness	Reader Mounting	Cut to Approximate Screw Length	Lock Mounting	Cut to Approximate Screw Length
1/16"	Coupling Nut & 3" Rod	10/16"	8-32 X 1-3/4" Break Away	1-1/16"
1/4"	Coupling Nut & 3" Rod	13/16"	8-32 X 1-3/4" Break Away	1-1/4"
1/2"	Coupling Nut & 3" Rod	1-1/16"	8-32 X 1-3/4" Break Away	1-7/16"
3/4"	Coupling Nut & 3" Rod	1-5/16"	8-32 X 1-3/4" Break Away	No Cut
1"	Coupling Nut & 3" Rod	1-9/16"	8-32 X 2-1/2"	2"
1-1/4"	Coupling Nut & 3" Rod	1-13/16"	8-32 X 2-1/2"	No Cut
1-1/2"	Coupling Nut & 3" Rod	2-1/16"	8-32 X 2-3/4"	No Cut

Micro USB Port


For emergency power & local (hard wired) firmware updates, use micro USB port located on the side of the K100 reader.



Prepping the Cabinet/ Drawer Face



1. Separate Strike Plate Template.
2. ESTABLISH CENTERLINE (for double door cabinet see Double Door Prepping, next page).
3. MEASURE cabinet wall thickness and mark offset line on face of cabinet/drawer. The offset line should match with the interior edge of the cabinet wall.
4. CONTINUE CENTERLINE to the face of cabinet/drawer.
5. ALIGN template to offset line and centerline. Remove backing and apply template onto cabinet/drawer face.
6. Use punch to mark drilling locations, then drill mounting holes. If using mechanical Key override, drill key override hole as well.

Diagram 3: Installation Template

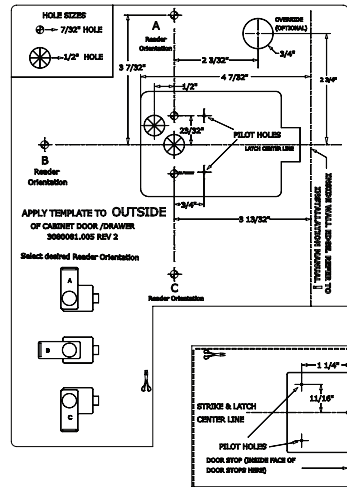

Strike Plate
Template


Diagram 4: Prepping

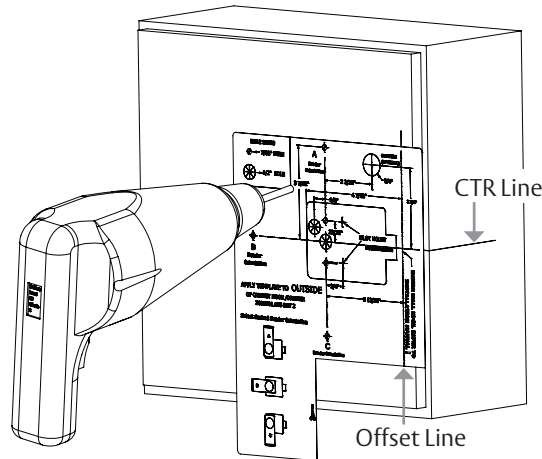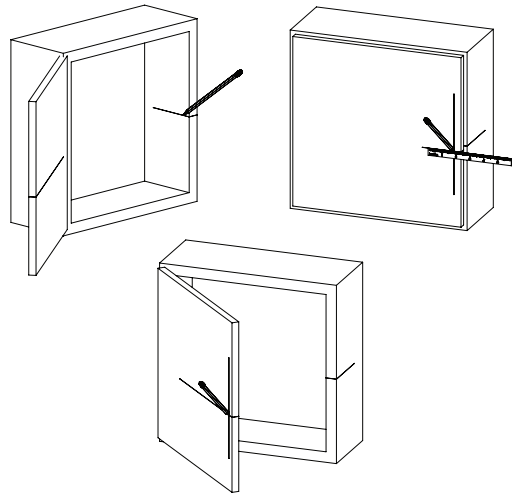

Double Door Prepping

Diagram 5: Double Door Prep


1. Establish centerline on inside of stationary door.
2. Continue centerline onto outside face of cabinet.
3. Align offset line on template to the edge of the stationary door and align centerline above. Remove backing and apply template to cabinet face.
4. Use punch to mark drilling locations, then drill mounting holes. If using mechanical Key override, drill key override hole as well.

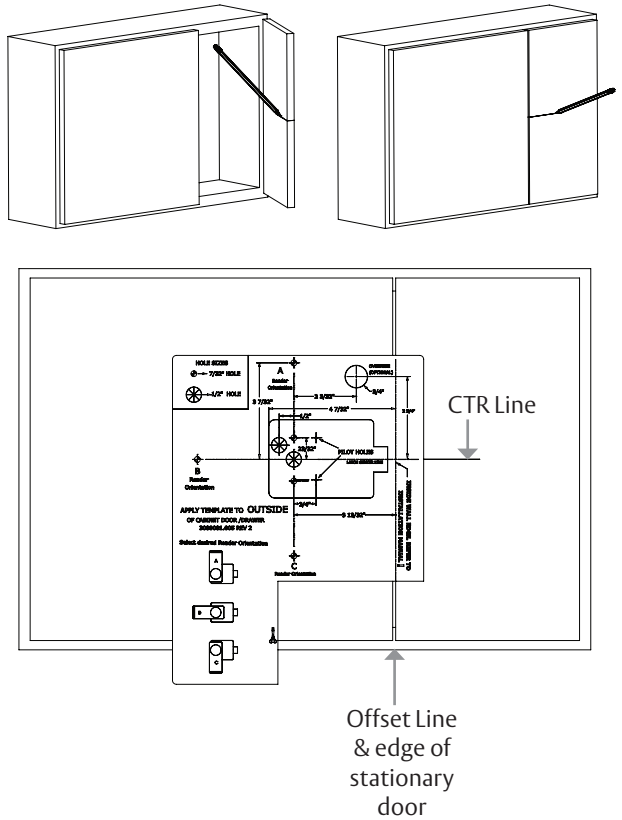

Reader Installation

1. ALIGN reader with mounting holes and pull cable through as shown. Trim the threaded rod to length as outlined in Mounting Screw Length table on page 3.
2. ADD Threadlock to threaded rod. Secure Reader to cabinet/drawer using the cut threaded rod and coupling nut. DO NOT over tighten.


Diagram 6: Reader Installation

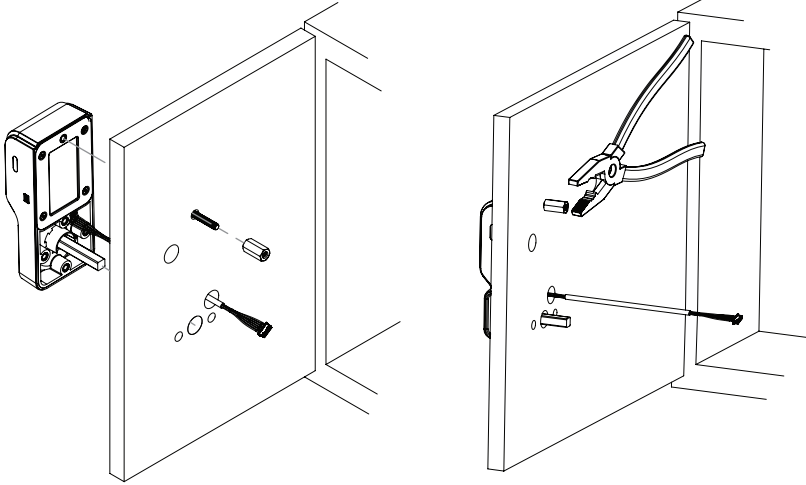

Installing Batteries

1. Install AA lithium batteries in appropriate position.
2. Install cover and secure using 2x Screw A.

Diagram 7: Installing Batteries

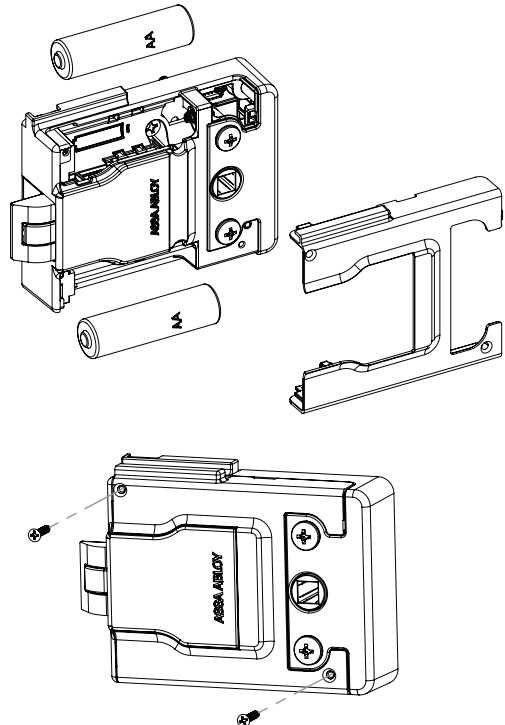

Lock Body Installation

Diagram 8: Step 1 & 2

1. INSERT reader cable through hole in back of lock body.
2. ALIGN lock body to mounting holes and secure to cabinet/drawer face using **2x screw f** and **2x screw d**. DO NOT over tighten. If required use Screw **e** or **g**, instead of **f**.
3. PLUG cable into slot on lock body.
4. Tuck excess cable into lock body cavity as shown in **Diagram 9**.
5. For cabinet/drawer face thicker than 1/2", add a third **Screw d** as shown in **Diagram 10**.

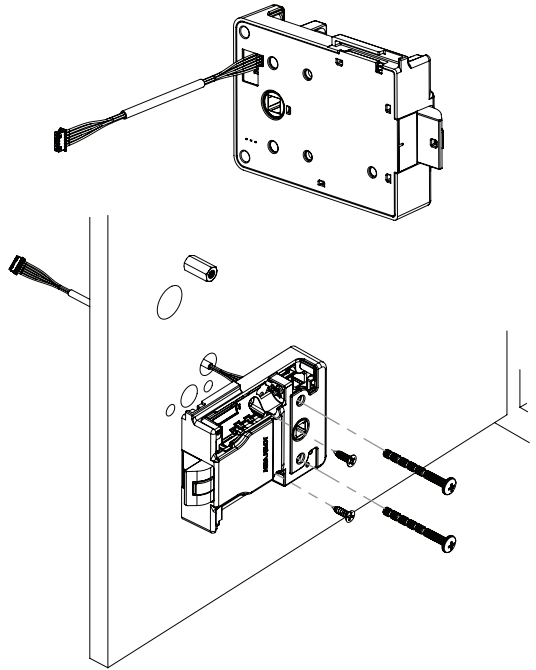


Diagram 9: Step 3 & 4


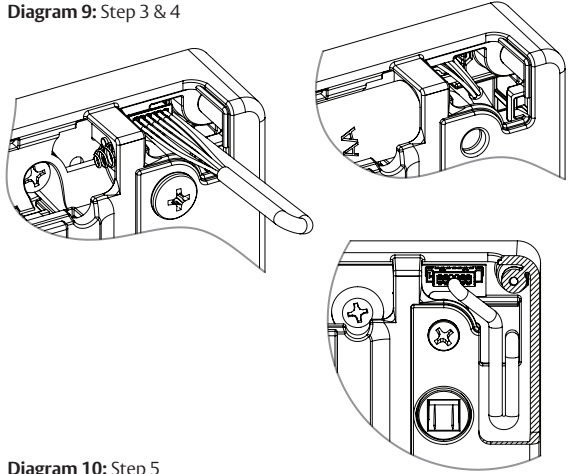


Diagram 10: Step 5

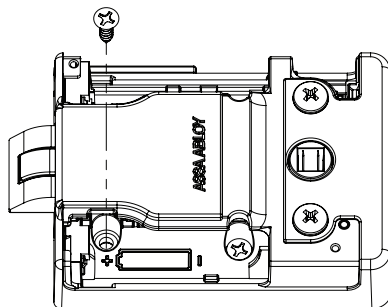


OPTIONAL

Diagram 11: Mechanical Override

Mechanical Override

1. SLIDE Override into slot as shown in Diagram 11.
2. ENSURE that override retracts latch bolt before installation. Override should rest loosely until lock body and battery cover are installed.

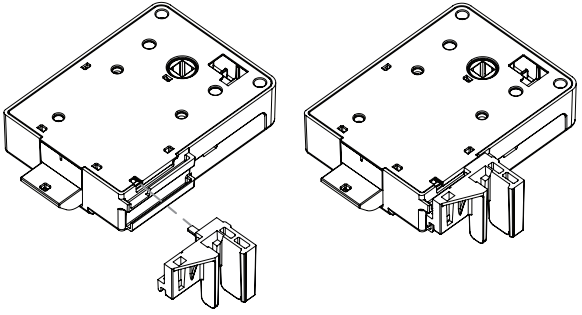


OPTIONAL

Diagram12: Mechanical Key Override

Mechanical Key Override


Mechanical key override cam lock sold separately.

1. INSERT CAM LOCK through the outside of the cabinet/drawer face and secure with locking nut.
2. INSERT the end of Cam into the mechanical override and secure with nut as shown in Diagram12.

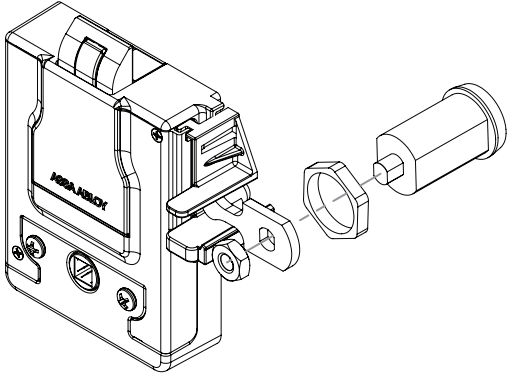

IMPORTANT NOTE

Reader MUST be programmed before installing the strike plate. If the cabinet is closed before the reader is programmed and after the strike plate is installed, you will be locked out of the cabinet.

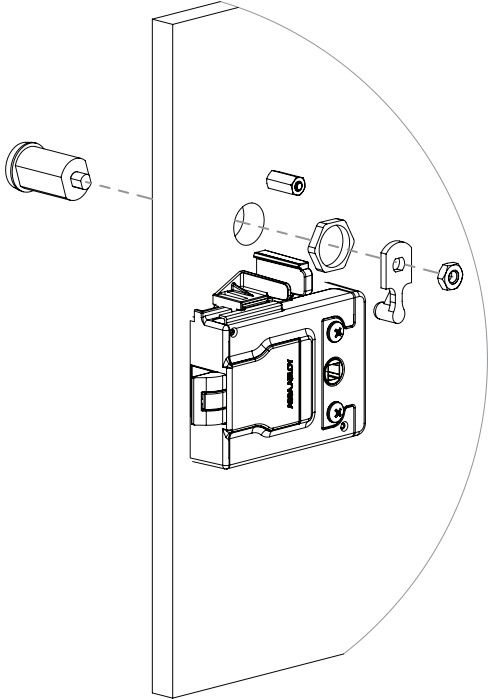

Strike Plate Installation

1. ALIGN strike plate template to centerline and edge of cabinet. Drill mounting holes.
2. SECURE strike plate to inside cabinet wall using **2x Screw d**, BUT DO NOT FULLY TIGHTEN. Adjust strike plate so the edge is flush with the cabinet wall edge then tighten.
3. After the strike plate is in the desired position, fasten **Screw d** into strike plate as shown in Diagram 15.

Diagram13: Strike Plate Template Use



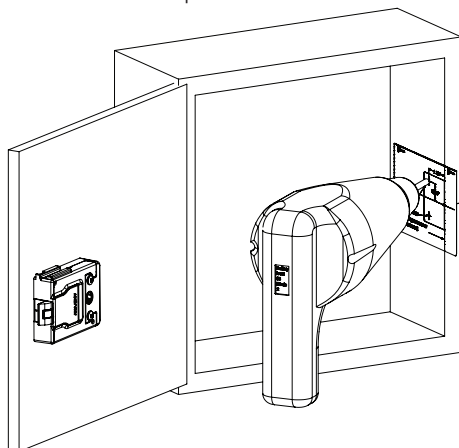


Diagram14: Strike Plate Installation



Diagram15: Step 3



Double Door Strike Plate Installation

1. ALIGN double door bracket with mounting holes from the strike plate template.
2. Secure strike plate to the double door bracket using **3x Screw d** as shown in Diagram 16.

Diagram16: Double Door Strike Plate Installation

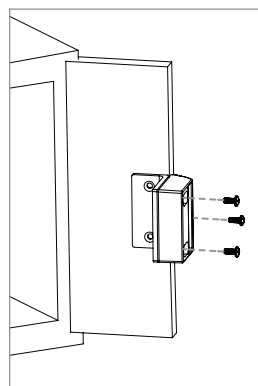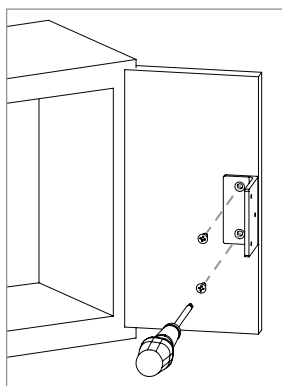

Aperio Hub Specifications

- **Approvals** CE, ETL, FCC, IC, C-Tick
- **Safety & Emissions**
FCC 47CFR Part 15 subpart B and subpart C;
IC RSS-210 EN ETSI 301 489-17 v2.1.1; ENETSI
300 328 v1.7.1; EN 60950-1 ed.2 2007
- **Dimensions** 82mm x 82mm x 37mm
- **Power Supply** 8-24 VDC
- **Current** 250 mA minimum
- **Internal Antenna** 2 cross polarized dipoles
- **External Antenna (Part No. EXT-10-ANT)**
One reverse polarity SMA external antenna
connector. Optional antenna type dipole
with max antenna gain of 3.9dBi
- **Radio Standard** IEEE 802.15.4(2.4GHz)
– 15 channels (11-25)
- **Encryption (RadioCommunications)**
AES 128 bits
- **Wireless Operating Range** Up to 50 ft
- **Receiver Sensitivity**
-100dBm 20% PER
- **Wireless Transmit Power** 10 d Bm/MHz
- **Class of Protection** IP 20
- **Operating temperature**
41°F to 95°F [5°C to 35°C]
- **Humidity** < 95% non-condensing
- **Status** LED (red/green/yellow)

LED Codes

Aperio LED LOCK Codes		
(1) ONE Yellow Flash		Card read
(1) ONE Green Flash		Access Granted
(5) FIVE Yellow (1) ONE Red		Force Closed (in open mode)
Continuous Yellow Flashes (.25 sec every second)		Comhub busy
(1) ONE Red Flash		Access Denied (AC Online)
(3) THREE Red Flash		Access Denied (AC Offline)
Continuous Red Flashes (.125 sec every second)		Lock is Blocked (when closing)
(10) TEN Red Flashes		Error in Lock
Continuous Yellow Flashes (.25 sec every 5 seconds)		Low Battery
Continuous Red Flashes (.25 sec every 5 seconds)		Dead Battery


Aperio LED HUB Codes		
Steady Green		Online
Steady Green + (1) ONE Red Flash		Lock Offline
Steady Green + (2) TWO Red Flashes		Access Control Offline
Steady Green + (3) Three Red Flashes		Access Control & Lock Offline
Flashing Yellow		UHF Communication

Connecting the Hub

The following applies only to Aperio factory paired kits with AH20 Hubs.

- 1. Connect the Wiegand D1, D0, red, and green LED signals.

NOTE: The Green LED input is used to grant access to the cabinet lock. If the Green LED signal is not available to indicate approved access, the approval input can be activated by a relay with "NO" attached to Green LED and "C" to GND. The Red LED input is used to indicate access denied. If the RED LED signal is not connected, the lock will flash RED three times when a non-approved card is presented indicating loss of connection to the hub rather than access denied. Any other codes may be reference on the LED reference card.

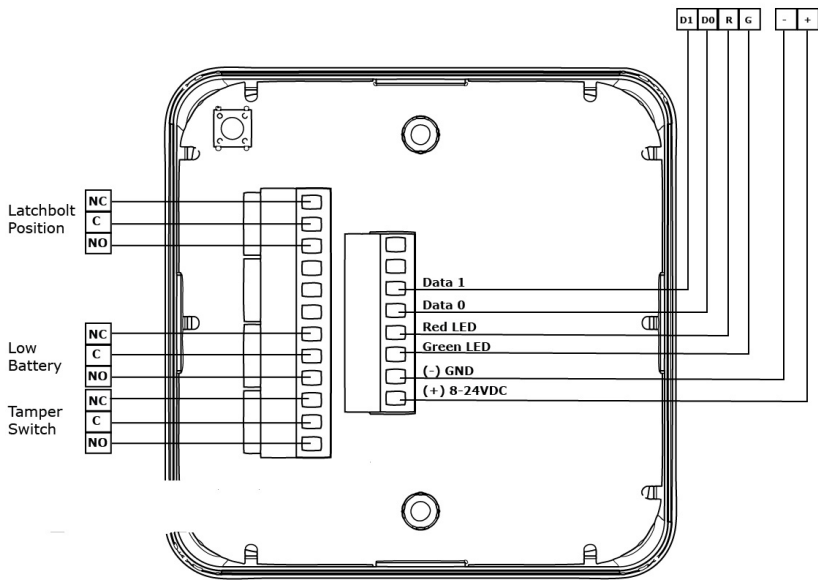

For placement of hub, see AH20/AH30
Installation Instructions

WARNING

FCC Statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

Operation with non-approved equipment is likely to result in interference to radio and TV reception. The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment. To comply with FCC and Industry Canada RF radiation exposure limits for general population, the module must be installed to provide a separation distance of at least 20cm from all persons and must not be colocated or operating in conjunction with any other antenna or transmitter.

This module is labeled with its own FCC ID and IC Certification Number. If the FCC ID and IC Certification Number are not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. In that case, the final end product must be labeled in a visible area with the following:

Contains FCC ID: VC3-R100V3

Contains IC: 7160A-R100V3

IC Statement

This device complies with Industry Canada license-exempt RSS standards(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation.

Conformité aux normes FCC

Cet équipement a été testé et trouvé conforme aux limites pour un dispositif numérique de classe B, conformément à la Partie 15 des règlements de la FCC. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet équipement génère, utilise et peut émettre des fréquences radio et, s'il n'est pas installé et utilisé conformément ment aux instructions du fabricant, peut causer des interférences nuisibles aux communications radio. Rien ne garantit cependant que l'interférence ne se produira pas dans une installation particulière. Si cet équipement provoque des interférences nuisibles à la réception radio ou de télévision, qui peut être déterminé en comparant et en l'éteignant, l'utilisateur est encouragé à essayer de corriger les interférences par une ou plusieurs des mesures suivantes:

1. Réorienter ou déplacer l'antenne de réception.
2. Augmenter la distance entre l'équipement et le récepteur.
3. Branchez l'appareil dans une prise sur un circuit différent de celui auquel le récepteur est connecté.
4. Consultez votre revendeur ou un technicien radio / TV pour assistance. Avertissement

Les changements ou modifications à cet appareil sans expressément approuvée par la partie responsable de conformité pourraient annuler l'autorité de l'utilisateur de faire fonctionner cet équipement. L'opération est soumise aux deux conditions suivantes:

- (1) Cet appareil ne doit pas causer d'interférences nuisibles, et
- (2) Cet appareil doit accepter toute interférence reçue, y compris les interférences susceptibles de provoquer un fonctionnement indésirable.

Pour se conformer aux limites d'exposition aux rayonnements RF de la FCC et d'Industrie Canada pour la population en général, le module doit être installé pour fournir une distance de séparation d'au moins 20 cm de toutes les personnes et ne doit pas être localisé ou en combinaison avec une autre antenne ou émetteur.

Ce module est étiqueté avec son ID FCC et son numéro de certification IC. Si l'identifiant FCC et le numéro de certification IC ne sont pas visibles lorsque le module est installé à l'intérieur d'un autre appareil, l'extérieur de l'appareil dans lequel le module est installé doit également afficher une étiquette faisant référence au module ci-joint. Dans ce cas, le produit final doit être étiqueté dans une zone visible avec ce qui suit:

Contient FCC ID: VC3-R100V3

Contient IC ID: 7160A-R100V3

Conformité aux normes IC

Cet appareil est conforme avec Industrie Canada exempt de licence RSS standard(s). Son fonctionnement est soumis aux deux conditions suivantes:

- (1) cet appareil ne peut causer d'interférences, et
- (2) cet appareil doit accepter toute interférence, y compris des interférences qui peuvent provoquer un fonctionnement indésirable du périphérique.

12 of 12

ELECTRONIC SECURITY HARDWARE

HES | Securitron

techsupport.esh@assaabloy.com | 800 626 7590
assaabloyesh.com

10027 S 51st Street, Ste. 102 Phoenix, AZ 85044 USA

Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2020, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. 3080006.016_4