



DESCRIPTION

The JS-1HD is a sub master station for the JS Series. The JS Series is a single door, 2 master station system. The master station and sub station features a 3.5" screen and buttons allowing for door release and monitoring of the door station.

The JS-1MD master station and JS-DA door station are only available in the JSS-1A kit. The JS-1HD sub master station can be added to the kit to expand the system to its maximum capacity of 1 door station and 2 inside answering stations.


FEATURES

- 3.5" screen
- Slim compact design
- VOX or PTT communication
- Simple 2 wire connection

JS-1HD

Video Sub Master Station for JS Series

FEATURE CALL-OUT

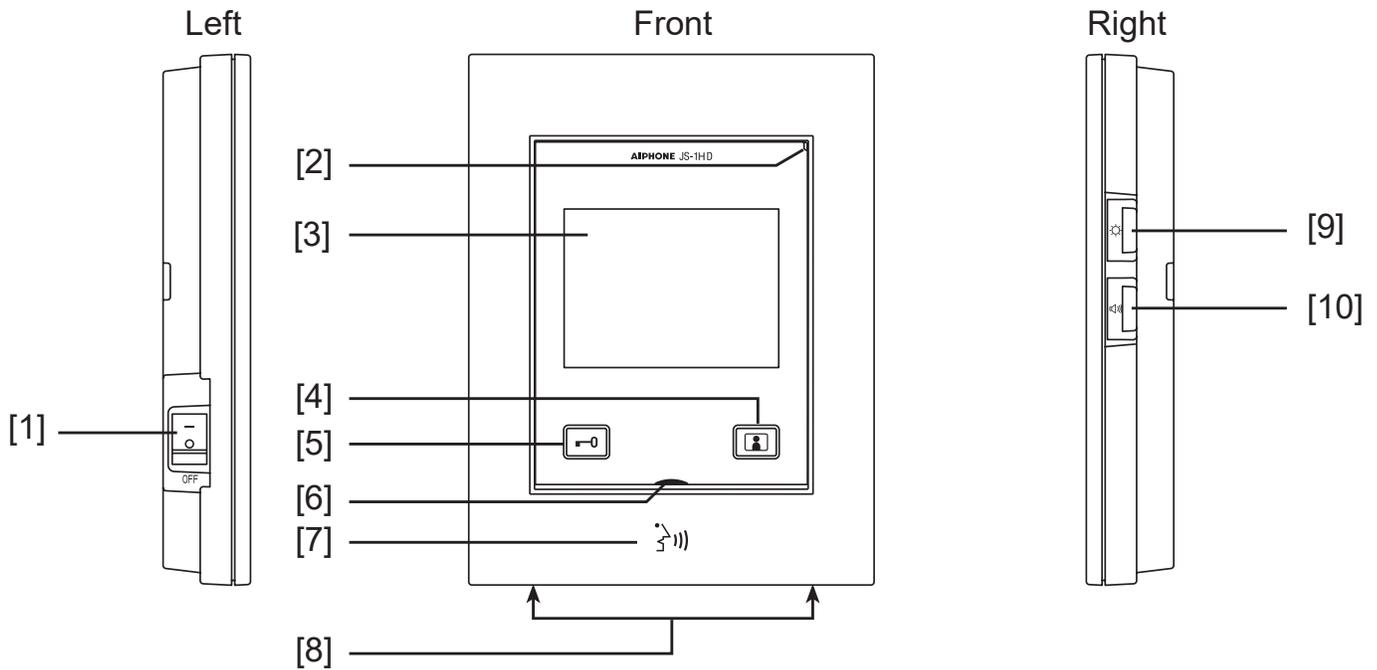

FEATURE CALL-OUT DEFINITIONS

- [1] Power switch
- [2] Microphone
- [3] 3.5" color LCD screen
- [4] Monitor button
- [5] Door release button
- [6] Audio transmit LED (orange)
- [7] Talk/Off button
- [8] Speaker
- [9] Screen brightness control button
- [10] Volume control button

SPECIFICATIONS

- Power Source: 24V DC (use PS-2420UL)
- Consumption: 115mA (Max)
- Screen: 3.5" TFT color LCD
- Door release contact: 24V AC/DC 1 Amp
- Communication: Open-voice hands-free auto-voice actuation or PTT
- Operating Temp: 32° ~ 104°F (0° ~ 40°C)
- Dimensions: 6-5/8" H x 5-1/16" W x 1-1/8" D