

T2M7LXK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE
+PLUS

Altronix T2M7LXK1D is a 8-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2M7LXK1D accommodates one (1) Intelligent Dual Reader Controller and three (3) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



T2M7LXK1D - includes
AL1024ULXB2, ACMS8CB, VR6, PDS8CB,
wire harnesses and finger duct

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
 - 1 - LP1502 / LP4502 and 3 - MR52
- Convenient knockout configuration:
 - One (1) single knockout - 2" Conduit
 - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
 - Removable backplane
 - 2" high finger duct for wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

Specifications

Power Supply (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 4.2A max.
Fusing	5A/250V

Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

Back-up Battery

Capacity	12AH /12VDC (2 within enclosure) 40 AH/65 AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Voltage Regulator (VR6):

Input

Voltage	24VDC from AL1024ULXB2
---------	------------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Access Power Controllers (ACMS8CB):

Input

Voltage	24VDC from AL1024ULXB2 and 12VDC from VR6
Input PTC	9A

Outputs

Voltage	12VDC and/or 24VDC
Eight (8) independently controlled fused outputs	
a) Fail-Safe and/or Fail-Secure power outputs.	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Dual Input Power Distribution Module (PDS8CB):

Input

Voltage	12VDC from VR6 and 24VDC from AL1024ULXB2
Input PTC	9A

Outputs

Voltage	12VDC and/or 24VDC
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	

Outputs Ratings

PTCs	2.5A
------	------

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

T2M7LXK1D Kit:

Agency Listings

CE	European Conformity
All components of this Trove kit are UL Listed sub-assemblies	
Please refer to the corresponding Sub-Assembly Installation Guides for further information	

Physical and Environmental:

Dimensions (H x W x D)

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product:	41.6 lb. (18.87 kg)
Shipping:	45.6 lb. (20.68 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity


85% +/- 5%

BTU/Hr. (approx.):

145 BTU/Hr

T2M7LXK1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

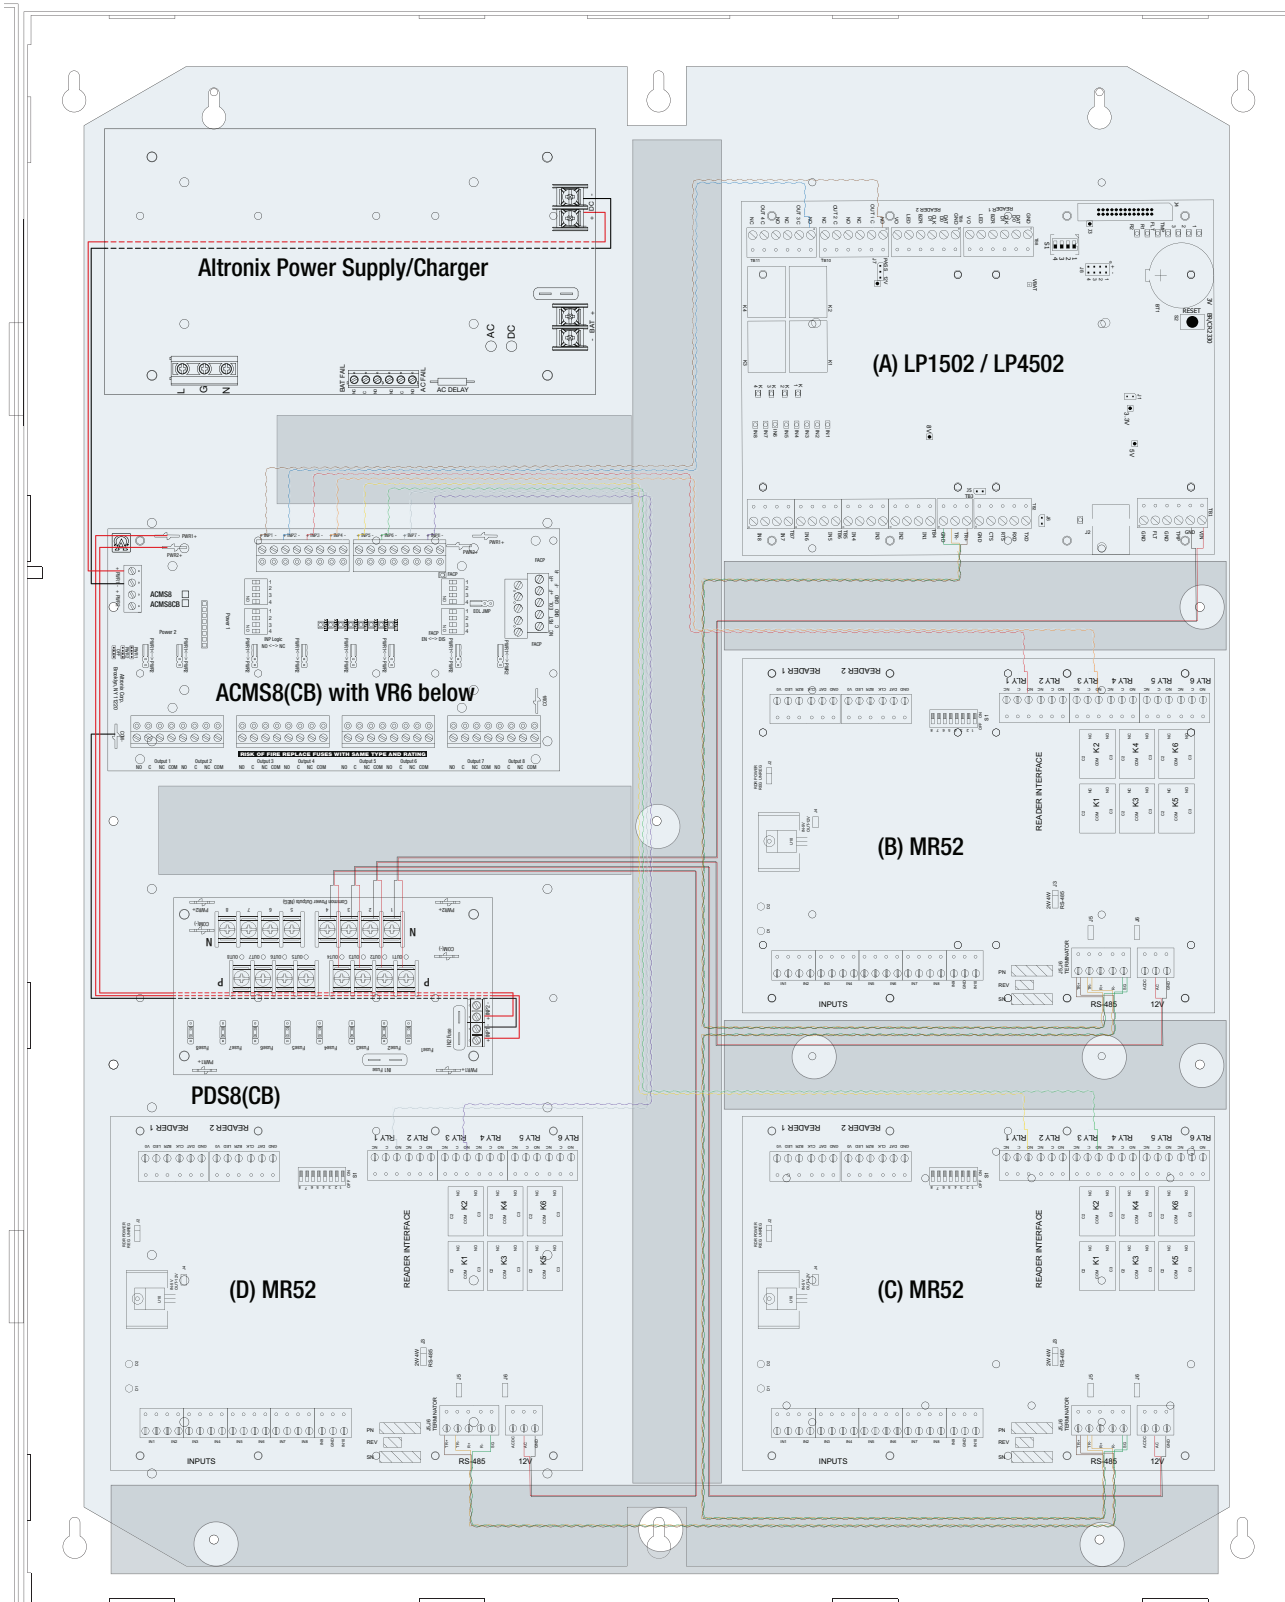

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

